

A

Practitioner's Docket No. U 012394-7

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of
Inventor(s):

1. SHIMON SHNITZER
2. RONEN HCHMAN
3. SHLOMO TSURRI
4. DORON SHAHAR

WARNING: 37 C.F.R. § 1.41(a)(1) points out:

"(a) A patent is applied for in the name or names of the actual inventor or inventors.

(1) The inventorship of a nonprovisional application is that inventorship set forth in the oath or declaration as prescribed by § 1.63, except as provided for in § 1.53(d)(4) and § 1.63(d). If an oath or declaration as prescribed by § 1.63 is not filed during the pendency of a nonprovisional application, the inventorship is that inventorship set forth in the application papers filed pursuant to § 1.53(b), unless a petition under this paragraph accompanied by the fee set forth in § 1.17(i) is filed supplying or changing the name or names of the inventor or inventors."

For (title):

DATA NETWORK AND PSTN TELEPHONY SYSTEM

CERTIFICATION UNDER 37 C.F.R. 1.10*

(Express Mail label number is mandatory.)

(Express Mail certification is optional.)

I hereby certify that this correspondence and the documents referred to as attached therein are being deposited with the United States Postal Service on this date SEPTEMBER 7, 1999, in an envelope as "Express Mail Post Office to Addressee," mailing Label Number EE784098195US, addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

GERALDINE MARTI

(type or print name of person mailing paper)

Geraldine Marti

Signature of person mailing paper

WARNING: Certificate of mailing (first class) or facsimile transmission procedures of 37 C.F.R. 1.8 cannot be used to obtain a date of mailing or transmission for this correspondence.

***WARNING:** Each paper or fee filed by "Express Mail" **must** have the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 C.F.R. 1.10(b).
"Since the filing of correspondence under § 1.10 without the Express Mail mailing label thereon is an oversight that can be avoided by the exercise of reasonable care, requests for waiver of this requirement will **not** be granted on petition." Notice of Oct. 24, 1996, 60 Fed. Reg. 56,439, at 56,442.

(Application Transmittal—page 1 of 12) 4-1

EE7.8 40.9.8 195US

1. Type of Application

This new application is for a(n)

(check one applicable item below)

- ☐ Original (nonprovisional)
- ☐ Design
- ☐ Plant

WARNING: Do not use this transmittal for a completion in the U.S. of an International Application under 35 U.S.C. 371(c)(4), unless the International Application is being filed as a divisional, continuation or continuation-in-part application.

WARNING: Do not use this transmittal for the filing of a provisional application.

NOTE: If one of the following 3 items apply, then complete and attach **ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF A PRIOR U.S. APPLICATION CLAIMED** and a **NOTIFICATION IN PARENT APPLICATION OF THE FILING OF THIS CONTINUATION APPLICATION**.

- ☐ Divisional.
- ☐ Continuation.
- ☒ Continuation-in-part (C-I-P).

2. Benefit of Prior U.S. Application(s) (35 U.S.C. 119(e), 120, or 121)

NOTE: A nonprovisional application may claim an invention disclosed in one or more prior filed copending nonprovisional applications or copending international applications designating the United States of America. In order for a nonprovisional application to claim the benefit of a prior filed copending nonprovisional application or copending international application designating the United States of America, each prior application must name as an inventor at least one inventor named in the later filed nonprovisional application and disclose the named inventor's invention claimed in at least one claim of the later filed nonprovisional application in the manner provided by the first paragraph of 35 U.S.C. 112. Each prior application must also be:

(i) An international application entitled to a filing date in accordance with PCT Article 11 and designating the United States of America; or

(ii) Complete as set forth in § 1.51(b); or

(iii) Entitled to a filing date as set forth in § 1.53(b) or § 1.53(d) and include the basic filing fee set forth in § 1.16; or

(iv) Entitled to a filing date as set forth in § 1.53(b) and have paid therein the processing and retention fee set forth in § 1.21(l) within the time period set forth in § 1.53(f).

37 C.F.R. § 1.78(a)(1).

NOTE If the new application being transmitted is a divisional, continuation or a continuation-in-part of a parent case, or where the parent case is an International Application which designated the U.S., or benefit of a prior provisional application is claimed, then check the following item and complete and attach **ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED**.

WARNING: *If an application claims the benefit of the filing date of an earlier filed application under 35 U.S.C. 120, 121 or 365(c), the 20-year term of that application will be based upon the filing date of the earliest U.S. application that the application makes reference to under 35 U.S.C. 120, 121 or 365(c). (35 U.S.C. 154(a)(2) does not take into account, for the determination of the patent term, any application on which priority is claimed under 35 U.S.C. 119, 365(a) or 365(b).) For a c-i-p application, applicant should review whether any claim in the patent that will issue is supported by an earlier application and, if not, the applicant should consider canceling the reference to the earlier filed application. The term of a patent is not based on a claim-by-claim approach. See Notice of April 14, 1995, 60 Fed. Reg. 20,195, at 20,205.*

WARNING: *When the last day of pendency of a provisional application falls on a Saturday, Sunday, or Federal holiday within the District of Columbia, any nonprovisional application claiming benefit of the provisional application **must** be filed prior to the Saturday, Sunday, or Federal holiday within the District of Columbia. See 37 C.F.R. § 1.78(a)(3).*

- ☒ [X] The new application being transmitted claims the benefit of prior U.S. application(s).
Enclosed are ADDED PAGES FOR NEW APPLICATION TRANSMITTAL
WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

3. Papers Enclosed

A. Required for Filing Date under 37 C.F.R. § 1.53(b) (Regular) or 37 C.F.R. § 1.153 (Design) Application

31 Pages of Specification
5 Pages of Claims
12 Sheets of Drawing

WARNING: ***DO NOT** submit original drawings. A high quality copy of the drawings should be supplied when filing a patent application. The drawings that are submitted to the Office must be on strong, white, smooth, and non-shiny paper and meet the standards according to § 1.84. If corrections to the drawings are necessary, they should be made to the original drawing and a high-quality copy of the corrected original drawing then submitted to the Office. Only one copy is required or desired. For comments on proposed then-new 37 C.F.R. 1.84, see Notice of March 9, 1988. (1990 O.G. 57-62).*

NOTE: *"Identifying indicia, if provided, should include the application number or the title of the invention, inventor's name, docket number (if any), and the name and telephone number of a person to call if the Office is unable to match the drawings to the proper application. This information should be placed on the back of each sheet of drawing a minimum distance of 1.5 cm. (5/8 inch) down from the top of the page. . . ." 37 C.F.R. § 1.84(c)).*

(complete the following, if applicable)

- ☐ [] The enclosed drawing(s) are in color, and there is also attached a "PETITION TO ACCEPT COLOR DRAWING(S)." 37 C.F.R. § 1.84(b).

- ☐ [] Formal
☐ [] Informal

B. Other Papers Enclosed

 Pages of declaration and power of attorney
 1 Pages of Abstract
 Other

4. Additional Papers Enclosed

- ☐ Amendment to claims
 - ☐ Cancel in this applications claims _____ before calculating the filing fee.
(At least one original independent claim must be retained for filing purposes.)
 - ☐ Add the claims shown on the attached amendment. (Claims added have been numbered consecutively following the highest numbered original claims.)
- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement (37 C.F.R. § 1.98)
- ☐ Form PTO-1449 (PTO/SB/08A and 08B)
- ☐ Citations
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing," computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.
- ☐ Authorization of Attorney(s) to Accept and Follow Instructions from Representative
- ☐ Special Comments
- ☐ Other

5. Declaration or Oath (including power of attorney)

NOTE: *A newly executed declaration is not required in a continuation or divisional application provided the prior nonprovisional application contained a declaration as required, the application being filed is by all or fewer than all the inventors named in the prior application, there is no new matter in the application being filed, and a copy of the executed declaration filed in the prior application (showing the signature or an indication thereon that it was signed) is submitted. The copy must be accompanied by a statement requesting deletion of the names of person(s) who are not inventors of the application being filed. If the declaration in the prior application was filed under § 1.47 then a copy of that declaration must be filed accompanied by a copy of the decision granting § 1.47 status or, if a nonsigning person under § 1.47 has subsequently joined in a prior application, then a copy of the subsequently executed declaration must be filed. See 37 C.F.R. § 1.63(d)(1)-(3).*

NOTE: *A declaration filed to complete an application must be executed, identify the specification to which it is directed, identify each inventor by full name, including the family name, and at least one given name without abbreviation together with any other given name or initial, and the residence, post office address and country of citizenship of each inventor, and state whether the inventor is a sole or joint inventor. 37 C.F.R. § 1.63(a)(1)-(4)*

- ☐ Enclosed
Executed by

(check all applicable boxes)

 - ☐ inventor(s).
 - ☐ legal representative of inventor(s). 37 C.F.R. § 1.42 or 1.43.
 - ☐ joint inventor or person showing a proprietary interest on behalf of inventor who refused to sign or cannot be reached.
 - ☐ This is the petition required by 37 C.F.R. § 1.47 and the statement required by 37 C.F.R. § 1.47 is also attached. See item 13 below for fee.
- ☒ Not Enclosed.

NOTE: Where the filing is a completion in the U.S. of an International Application, or where the completion of the U.S. application contains subject matter in addition to the International Application, the application may be treated as a continuation or continuation-in-part, as the case may be, utilizing ADDED PAGE FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION CLAIMED.

☒ Application is made by a person authorized under 37 C.F.R. 1.41(c) on behalf of *all* the above named inventor(s).

(The declaration or oath, along with the surcharge required by 37 C.F.R. § 1.16(e), can be filed subsequently).

☐ Showing that the filing is authorized.
(not required unless called into question. 37 C.F.R. § 1.41(d))

6. Inventorship Statement

WARNING: *If the named inventors are each not the inventors of all the claims an explanation, including the ownership of the various claims at the time the last claimed invention was made, should be submitted.*

The inventorship for all the claims in this application are:

☐ The same.

or

☐ Not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made,

☐ is submitted.

☐ will be submitted.

7. Language

NOTE: *An application including a signed oath or declaration may be filed in a language other than English. An English translation of the non-English language application and the processing fee of \$130.00 required by 37 C.F.R. § 1.17(k) is required to be filed with the application, or within such time as may be set by the Office. 37 C.F.R. § 1.52(d).*

☒ English

☐ Non-English

☐ The attached translation includes a statement that the translation is accurate.
37 C.F.R. § 1.52(d).

8. Assignment

☒ An assignment of the invention to SHELCAD COMMUNICATIONS LTD.

☐ is attached. A separate ☐ "COVER SHEET FOR ASSIGNMENT (DOCUMENT) ACCOMPANYING NEW PATENT APPLICATION" or ☐ FORM PTO 1595 is also attached.

☒ will follow.

☐ was filed ☐ and recorded in parent application _____

NOTE: *"If an assignment is submitted with a new application, send two separate letters—one for the application and one for the assignment" Notice of May 4, 1990 (1114 O.G. 77-78).*

WARNING: *A newly executed "STATEMENT UNDER 37 C.F.R. § 3.73(b)" must be filed when a continuation-in-part application is filed by an assignee. Notice of April 30, 1993, 1150 O.G. 62-64.*

9. Certified Copy

Certified copy(ies) of application(s)

Country	Appln. no.	Filed
Country	Appln. no.	Filed
Country	Appln. no.	Filed

from which priority is claimed

- ☐ is (are) attached.
☐ will follow.

NOTE: *The foreign application forming the basis for the claim for priority must be referred to in the oath or declaration. 37 C.F.R. § 1.55(a) and 1.63.*

NOTE: *This item is for any foreign priority for which the application being filed directly relates. If any parent U.S. application or International Application from which this application claims benefit under 35 U.S.C. 120 is itself entitled to priority from a prior foreign application, then complete item 18 on the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.*

10. Fee Calculation (37 C.F.R. § 1.16)

A. ☒ Regular application

CLAIMS AS FILED						
Claims	Number Filed	Basic Fee Allowance	Number Extra	Rate	Basic Fee 37 C.F.R. § 1.16(a) \$760.00	
Total Claims (37 C.F.R. § 1.16(c))	33	- 20 =	13 x	\$ 18.00	234.00	
Independent Claims (37 C.F.R. § 1.16(b))	11	- 3 =	8 x	\$ 78.00	624.00	
Multiple Dependent Claim(s), if any (37 C.F.R. § 1.16(d))			+	\$260.00		

- ☐ Amendment cancelling extra claims is enclosed.
☐ Amendment deleting multiple-dependencies is enclosed.
☒ Fee for extra claims is not being paid at this time.

NOTE: *If the fees for extra claims are not paid on filing they must be paid or the claims cancelled by amendment, prior to the expiration of the time period set for response by the Patent and Trademark Office in any notice of fee deficiency. 37 C.F.R. § 1.16(d).*

Filing Fee Calculation \$ 1,618.00

B. ☐ Design application
 (\$310.00—37 C.F.R. § 1.16(f))

Filing Fee Calculation \$ _____

C. ☐ Plant application
 (\$480.00—37 C.F.R. § 1.16(g))

Filing Fee Calculation \$ _____

11. Small Entity Statement(s)

- ☐ Statement(s) that this is a filing by a small entity under 37 C.F.R. §§ 1.9 and 1.27 is (are) attached.

WARNING:

"Status as a small entity must be specifically established in each application or patent in which the status is available and desired. Status as a small entity in one application or patent does not affect any other application or patent, including applications or patents which are directly or indirectly dependent upon the application or patent in which the status has been established. The refiling of an application under § 1.53 as a continuation, division, or continuation-in-part (including a continued prosecution application under § 1.53(d)), or the filing of a reissue application requires a new determination as to continued entitlement to small entity status for the continuing or reissue application. A nonprovisional application claiming benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) of a prior application, or a reissue application may rely on a statement filed in the prior application or in the patent if the nonprovisional application or the reissue application includes a reference to the statement in the prior application or in the patent and status as a small entity is still proper and desired. The payment of the small entity basic statutory filing fee will be treated as such a reference for purposes of this section." 37 C.F.R. § 1.28(a)(2).

(complete the following, if applicable)

- ☐ Status as a small entity was claimed in prior application _____, filed on _____ from which benefit is being claimed for this application under:

35 U.S.C. § ☐ 119(e),
☐ 120,
☐ 121,
☐ 365(c),

and which status as a small entity is still proper and desired.

- ☐ A copy of the statement in the prior application is included.

Filing Fee Calculation (50% of A, B or C above) \$ _____

NOTE: Any excess of the full fee paid will be refunded if a small entity status is established refund request are filed within 2 months of the date of timely payment of a full fee. The two-month period is not extendable under § 1.136. 37 C.F.R. § 1.28(a).

12. Request for International-Type Search (37 C.F.R. § 1.104(d))

(complete, if applicable)

- ☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

13. Fee Payment Being Made at This Time

☒ Not Enclosed

☒ No filing fee is to be paid at this time.
(This and the surcharge required by 37 C.F.R. § 1.16(e) can be paid subsequently.)

☐ Enclosed

☐ Filing fee \$ _____

☐ Recording assignment
(\$40.00; 37 C.F.R. § 1.21(h))
(See attached "COVER SHEET FOR
ASSIGNMENT ACCOMPANYING NEW
APPLICATION.") \$ _____

☐ Petition fee for filing by other
than all the inventors or person
on behalf of the inventor where
inventor refused to sign or cannot
be reached
(\$130.00; 37 C.F.R. §§ 1.47 and 1.17(i)) \$ _____

☐ For processing an application with a
specification in a non-English language
(\$130.00; 37 C.F.R. §§ 1.52(d) and 1.17(k)) \$ _____

☐ Processing and retention fee
(\$130.00; 37 C.F.R. §§ 1.53(d) and 1.21(l)) \$ _____

☐ Fee for international-type search report
(\$40.00; 37 C.F.R. § 1.21(e)) \$ _____

NOTE: 37 C.F.R. § 1.21(l) establishes a fee for processing and retaining any application that is abandoned for failing to complete the application pursuant to 37 C.F.R. § 1.53(f) and this, as well as the changes to 37 C.F.R. § 1.53 and 1.78(a)(1), indicate that in order to obtain the benefit of a prior U.S. application, either the basic filing fee must be paid, or the processing and retention fee of § 1.21(l) must be paid, within 1 year from notification under § 53(f).

Total Fees Enclosed \$ _____

14. Method of Payment of Fees

☐ Check in the amount of \$ _____.

☐ Charge Account No. _____ in the amount of \$ _____.
A duplicate of this transmittal is attached.

NOTE: Fees should be itemized in such a manner that it is clear for which purpose the fees are paid. 37 C.F.R. § 1.22(b).

15. Authorization to Charge Additional Fees

WARNING: If no fees are to be paid on filing, the following items should not be completed.

WARNING: Accurately count claims, especially multiple dependent claims, to avoid unexpected high charges, if extra claim charges are authorized.

☐ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. _____.

☐ 37 C.F.R. § 1.16(a), (f) or (g) (filing fees)

☐ 37 C.F.R. § 1.16(b), (c) and (d) (presentation of extra claims)

NOTE: Because additional fees for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency (37 C.F.R. § 1.16(d)), it might be best not to authorize the PTO to charge additional claim fees, except possibly when dealing with amendments after final action.

☐ 37 C.F.R. § 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

☐ 37 C.F.R. § 1.17(a)(1)-(5) (extension fees pursuant to § 1.136(a).

☐ 37 C.F.R. § 1.17 (application processing fees)

NOTE: "A written request may be submitted in an application that is an authorization to treat any concurrent or future reply, requiring a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time. An authorization to charge all required fees, fees under § 1.17, or all required extension of time fees will be treated as a constructive petition for an extension of time in any concurrent or future reply requiring a petition for an extension of time under this paragraph for its timely submission. Submission of the fee set forth in § 1.17(a) will also be treated as a constructive petition for an extension of time in any concurrent reply requiring a petition for an extension of time under this paragraph for its timely submission." 37 C.F.R. § 1.136(a)(3).

☐ 37 C.F.R. § 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. § 1.311(b))

NOTE: Where an authorization to charge the issue fee to a deposit account has been filed before the mailing of a Notice of Allowance, the issue fee will be automatically charged to the deposit account at the time of mailing the notice of allowance. 37 C.F.R. § 1.311(b)).

NOTE: 37 C.F.R. § 1.28(b) requires "Notification of any change in status resulting in loss of entitlement to small entity status must be filed in the application . . . prior to paying, or at the time of paying, . . . issue fee." From the wording of 37 C.F.R. § 1.28(b), (a) notification of change of status must be made even if the fee is paid as "other than a small entity" and (b) no notification is required if the change is to another small entity.

16. Instructions as to Overpayment

NOTE: "... Amounts of twenty-five dollars or less will not be returned unless specifically requested within a reasonable time, nor will the payer be notified of such amounts; amounts over twenty-five dollars may be returned by check or, if requested, by credit to a deposit account." 37 C.F.R. § 1.26(a).


☐ Credit Account No. _____.

☐ Refund

Reg. No.20,302

Tel. No.: (212)708-1888

Customer No.:

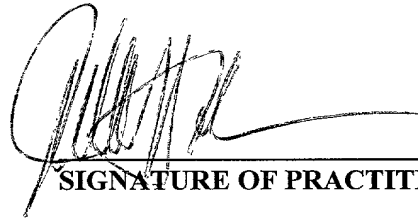

SIGNATURE OF PRACTITIONER

JULIAN H. COHEN

(type or print name of practitioner)

LADAS & PARRY

P.O. Address

26 WEST 61ST STREET

NEW YORK, NEW YORK 10023

☒ **Incorporation by reference of added pages**

(check the following item if the application in this transmittal claims the benefit of prior U.S. application(s) (including an international application entering the U.S. stage as a continuation, divisional or C-I-P application) and complete and attach the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED)

☒ Plus Added Pages for New Application Transmittal Where Benefit of Prior U.S. Application(s) Claimed

Number of pages added 5

☐ Plus Added Pages for Papers Referred to in Item 4 Above

Number of pages added _____

☐ Plus added pages deleting names of inventor(s) named on prior application(s) who is/are no longer inventor(s) of the subject matter claimed in this application.

Number of pages added _____

☐ Plus "Assignment Cover Letter Accompanying New Application"

Number of pages added _____

☐ **Statement Where No Further Pages Added**

(if no further pages form a part of this Transmittal, then end this Transmittal with this page and check the following item)

☐ This transmittal ends with this page.

ADDED PAGES FOR APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED

NOTE: See 37 CFR 1.78.

17. Relate Back

WARNING: If an application claims the benefit of the filing date of an earlier filed application under 35 U.S.C. 120, 121 or 365(c), the 20-year term of that application will be based upon the filing date of the earliest U.S. application that the application makes reference to under 35 U.S.C. 120, 121 or 365(c). (35 U.S.C. 154(a)(2) does not take into account, for the determination of the patent term, any application on which priority is claimed under 35 U.S.C. 119, 365(a) or 365(b).) For a c-i-p application, applicant should review whether any claim in the patent that will issue is supported by an earlier application and, if not, the applicant should consider canceling the reference to the earlier filed application. The term of a patent is not based on a claim-by-claim approach. See Notice of April 14, 1995, 60 Fed. Reg. 20,195, at 20,205.

(complete the following, if applicable)

☒ Amend the specification by inserting, before the first line, the following sentence:

A. 35 U.S.C. 119(e)

NOTE: "Any nonprovisional application claiming the benefit of one or more prior filed copending provisional applications must contain or be amended to contain in the first sentence of the specification following the title a reference to each such prior provisional application, identifying it as a provisional application, and including the provisional application number (consisting of series code and serial number)." 37 C.F.R. § 1.78(a)(4).

☐ "This application claims the benefit of U.S. Provisional Application(s) No(s):

APPLICATION NO(S):

FILING DATE

_____/_____
_____/_____
_____/_____

and incorporates the same by reference."

B. 35 U.S.C. 120, 121 and 365(c)

NOTE: "Except for a continued prosecution application filed under § 1.53(d), any nonprovisional application claiming the benefit of one or more prior filed copending nonprovisional applications or international applications designating the United States of America must contain or be amended to contain in the first sentence of the specification following the title a reference to each such prior application, identifying it by application number (consisting of the series code and serial number) or international application number and international filing date and indicating the relationship of the applications. . . . Cross-references to other related applications may be made when appropriate." (See § 1.14(a)). 37 C.F.R. § 1.78(a)(2).

☒ "This application is a

☐ continuation

☒ continuation-in-part

☐ divisional

of copending application(s)

☐ application number _____ filed on _____ and

☒ International Application PCT/IL98/00106 filed on MARCH 4, 1998 and which designated the U.S., claims the benefit thereof and incorporates the same by reference."

NOTE: The proper reference to a prior filed PCT application that entered the U.S. national phase is the U.S. serial number and the filing date of the PCT application that designated the U.S.

NOTE: (1) Where the application being transmitted adds subject matter to the International Application, then the filing can be as a continuation-in-part or (2) if it is desired to do so for other reasons then the filing can be as a continuation.

NOTE: The deadline for entering the national phase in the U.S. for an international application was clarified in the Notice of April 28, 1987 (1079 O.G. 32 to 46) as follows:

"The Patent and Trademark Office considers the International application to be pending until the 22nd month from the priority date if the United States has been designated and no Demand for International Preliminary Examination has been filed prior to the expiration of the 19th month from the priority date and until the 32nd month from the priority date if a Demand for International Preliminary Examination which elected the United States of America has been filed prior to the expiration of the 19th month from the priority date, provided that a copy of the international application has been communicated to the Patent and Trademark Office within the 20 or 30 month period respectively. If a copy of the international application has not been communicated to the Patent and Trademark Office within the 20 or 30 month period respectively, the international application becomes abandoned as to the United States 20 or 30 months from the priority date respectively. These periods have been placed in the rules as paragraph (h) of § 1.494 and paragraph (i) of § 1.495. A continuing application under 35 U.S.C. 365(c) and 120 may be filed anytime during the pendency of the international application."

☐ "The nonprovisional application designated above, namely application _____/_____, filed _____, claims the benefit of U.S. Provisional Application(s) No(s).:

APPLICATION NO(S).:

FILING DATE

_____ / _____	_____ "
_____ / _____	_____ "
_____ / _____	_____ "

☐ Where more than one reference is made above please combine all references into one sentence.

18. Relate Back—35 U.S.C. 119 Priority Claim for Prior Application

The prior U.S. application(s), including any prior International Application designating the U.S., identified above in item 17B, in turn itself claim(s) foreign priority(ies) as follows:

ISRAEL	120370	MARCH 4, 1997
--------	--------	---------------

Country	Appln. no.	Filed
---------	------------	-------

The certified copy(ies) has (have)

☒ [X] been filed in prior application PCT/IL98/00106 which was filed on MARCH 4, 1998.

☐ [] is (are) attached.

WARNING: *The certified copy of the priority application that may have been communicated to the PTO by the International Bureau may not be relied on without any need to file a certified copy of the priority application in the continuing application. This is so because the certified copy of the priority application communicated by the International Bureau is placed in a folder and is not assigned a U.S. serial number unless the national stage is entered. Such folders are disposed of if the national stage is not entered. Therefore, such certified copies may not be available if needed later in the prosecution of a continuing application. An alternative would be to physically remove the priority documents from the folders and transfer them to the continuing application. The resources required to request transfer, retrieve the folders, make suitable record notations, transfer the certified copies, enter and make a record of such copies in the Continuing Application are substantial. Accordingly, the priority documents in folders of international applications that have not entered the national stage may not be relied on. Notice of April 28, 1987 (1079 O.G. 32 to 46).*

19. Maintenance of Copendency of Prior Application

NOTE: *The PTO finds it useful if a copy of the petition filed in the prior application extending the term for response is filed with the papers constituting the filing of the continuation application. Notice of November 5, 1985 (1060 O.G. 27).*

A. ☐ [] Extension of time in prior application

*(This item **must** be completed and the papers filed **in the prior application**, if the period set in the prior application has run.)*

☐ [] A petition and fee extends the term in the pending **prior** application until _____.

☐ [] A **copy** of the petition filed in prior application is attached.

B. ☐ [] Transmittal of Payment of Issue Fee

(complete this item, if previous item not applicable)

☐ [] A Transmittal of Payment of Issue Fee is being filed in the pending **prior** application.

☐ [] A **copy** of the Issue Fee Transmittal filed in the prior application is attached.

20. Further Inventorship Statement Where Benefit of Prior Application(s) Claimed

(complete applicable item (a), (b) and/or (c) below)

(a) ☐ [] This application discloses and claims only subject matter disclosed in the prior application whose particulars are set out above and the inventor(s) in this application are

☐ [] the same.

☐ [] less than those named in the prior application. It is requested that the following inventor(s) identified for the prior application be deleted:

(type name(s) of inventor(s) to be deleted)

(b) ☐ [] This application discloses and claims additional disclosure by amendment and a new declaration

or oath is being filed. With respect to the prior application, the inventor(s) in this application are

☐ the same.

☐ the following additional inventor(s) have been added:

(type name(s) of inventor(s) to be deleted)

(c) ☐ The inventorship for all the claims in this application are

☐ the same.

☐ not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made

☐ is submitted.

☐ will be submitted.

21. Abandonment of Prior Application (if applicable)

☐ Please abandon the prior application at a time while the prior application is pending, or when the petition for extension of time or to revive in that application is granted, and when this application is granted a filing date, so as to make this application copending with said prior application.

NOTE: According to the Notice of May 13, 1983 (103, TMOG 6-7), the filing of a continuation or continuation-in-part application is a proper response with respect to a petition for extension of time or a petition to revive and should include the express abandonment of the prior application conditioned upon the granting of the petition and the granting of a filing date to the continuing application.

22. Petition for Suspension of Prosecution for the Time Necessary to File an Amendment

WARNING: "The claims of a new application may be finally rejected in the first Office action in those situations where (1) the new application is a continuing application of, or a substitute for, an earlier application, and (2) all the claims of the new application (a) are drawn to the same invention claimed in the earlier application, and (b) would have been properly finally rejected on the grounds of art of record in the next Office action if they had been entered in the earlier application." MPEP, § 706.07(b).

NOTE: Where it is possible that the claims on file will give rise to a first action final for this continuation application and for some reason an amendment cannot be filed promptly (e.g., experimental data is being gathered) it may be desirable to file a petition for suspension of prosecution for the time necessary.

(check the next item, if applicable)

☐ There is provided herewith a Petition To Suspend Prosecution for the Time Necessary to File An Amendment (New Application Filed Concurrently)

23. Small Entity (37 CFR § 1.28(a))

☐ Applicant has established small entity status by the filing of a statement in parent application _____ on _____.

☐ A copy of the statement previously filed is included.

WARNING: See 37 CFR § 1.28(a).

24. NOTIFICATION IN PARENT APPLICATION OF THIS FILING

☐ A notification of the filing of this
(check one of the following)

☐ continuation

☐ continuation-in-part

☐ divisional

is being filed in the parent application, from which this application claims priority under 35 U.S.C. § 120.

6/1/2016 10:00 AM

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
0	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	
2	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99		
3	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99			
4	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	9													

[illegible]

35192sp5 2/9/99

DATA NETWORK AND PSTN TELEPHONY SYSTEM

FIELD OF THE INVENTION

The present invention relates to data network and PSTN phone systems.

BACKGROUND OF THE INVENTION

The Internet telephone conversation is known. It has been possible for some time to have a voice conversation over the Internet, or other forms of computer network using a personal computer with a sound card, microphone, and speakers or an earphone. More recently there have been provided dedicated systems comprising a telephone keypad, receiver and screen. However such devices still require a sound card in order to work.

Common methods for voice communication over a computer network employ a sound card on each machine participating in the conversation.

Modified sound cards that enable a telephone to connect to a PC, are commercially available. For example, Phonejack and Linejack, by Quicknet Technology (www.quicknet.net), and Easyphone by Mediasonic (www.easyphone.com) enable a user to make telephone calls over the Internet using a PC related internal ISA card.

US Patents No. 5,553,122 to Haber *et al*; 5,495,246 to Nichols *et al*.; and 5,727,047 to Bentley *et al*. describe methods and apparatus for interfacing computing devices to an analog telephone network.

US Patent No. 5,473,676 to Frick *et al*. describes an interface system connected between the telephone base and handset which allows switching between voice and data communications over a single telephone line.

The disclosures of all publications mentioned in the specification are hereby

[illegible]

SUMMARY OF THE INVENTION

According to a first aspect of the present invention there is provided an adapter comprising an analog to digital converter, for connecting a telephone set to a computer.

In an embodiment the adapter may comprise a first output port configured as a telephone socket for attachment of a telephone plug. Preferably the adapter comprises, in addition, one or more additional output ports, configured as telephone sockets and each having a unique address.

The adapter may also have a look-up table for translating numerical address information entered at a key pad of the telephone into addresses on the computer. Alternatively, or additionally, the look-up table may be for translating numerical information entered at a key pad of the telephone into addresses on a network to which the computer is attachable. Alternatively or additionally the lookup table may contain Internet addresses and the computer may have access to the Internet.

According to a second aspect of the present invention there is provided an adapter comprising an analog to digital converter, for connecting a telephone set to a computer network.

In a preferred embodiment a first output port of the adapter is configured as a telephone socket for attachment of a telephone plug. In a variation of this embodiment the adapter may further comprise one or more additional output ports, likewise configured as telephone sockets and each having a unique address.

Preferably the adapter contains a look-up table for converting numerical data entered at a keypad of the telephone into addresses on the network. The network may for example be the Internet.

The adapter may be a standalone device, that is to say an adapter that is able to send data directly to the network without requiring the intermediacy of a computer, and may comprise a module for operating an Internet protocol.

According to a third aspect of the invention there is provided the use of a telephone as a peripheral device for a computer.

The telephone may be operatively attached to the computer via an adapter which is operable to convert digital signals output from the computer into analog signals for input to the telephone and to convert analog signals output from the telephone into digital signals for input to the computer. The telephone is thus usable for conducting voice communication over any network to which the computer is attached.

According to a fourth aspect of the present invention there is provided the use of a telephone as a peripheral device for a computer, the computer comprising control software for managing said telephone. The control software may be encryption software or it may be exchange management software that carries out the types of function provided by office based exchange equipment.

There is further provided according to another preferred embodiment of the present invention, a telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, the system including a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to responsively transmit at least one of voice information and signalling information to at least one of the local telephone instrument, the PSTN and the computer network.

There is additionally provided according to another preferred embodiment of the present invention, a telephone system with local ringing voltage generation, the system including a local ringing voltage generator operative to locally apply single line ringing voltage to a telephone instrument, thereby to induce the telephone instrument to produce a ringing tone, and a voltage generator actuator operative to actuate the local ringing voltage generator upon receipt of a single line voltage generation actuation signal from a remote public system telephone network.

Further in accordance with a preferred embodiment of the present invention, the telephone system also includes a public system telephone network operative to send a voltage generation actuation signal to the voltage generator actuator which signal is

incapable of directly actuating the telephone instrument to produce a ringing tone.

There is also provided according to another preferred embodiment of the present invention, a method for setting up a conference call between three participants, the method including providing a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze signalling information and voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to responsively transmit at least one of voice information and signalling information to at least one of the local telephone instrument, the PSTN and the computer network, and using the digital telephone switch controller to set up a conference call between the local telephone instrument, a remote telephone instrument, via the PSTN, and a remote subscriber to the computer network, via the computer network.

Still further in accordance with a preferred embodiment of the present invention the controller receives digital voice information from the remote computer network subscriber, via the computer network.

Additionally in accordance with a preferred embodiment of the present invention, the controller receives analog voice information from the local telephone instrument.

Further in accordance with a preferred embodiment of the present invention, the controller receives analog voice information from the PSTN.

Also in accordance with a preferred embodiment of the present invention, the controller is operative to analyze signalling information and voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network.

There is further provided according to another preferred embodiment of the present invention, a telephone communication system providing communication between a multiplicity of telephone instruments via at least one PSTN and at least one computer network, the system including a digital telephone switch controller interfacing

between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to perform local least cost call routing of corresponding voice information to a remote telephone instrument.

Further in accordance with a preferred embodiment of the present invention, the switch controller is operative to mix voice information arriving from the local telephone instrument with voice information arriving from the PSTN.

There is additionally provided, according to another preferred embodiment of the present invention, a telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, the system including a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to route at least one of voice information and signalling information accordingly.

Still further in accordance with a preferred embodiment of the present invention, the adapter is implemented on a PC card.

There is further provided, according to another preferred embodiment of the present invention, a telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, and operative to record the communication at a local level, the system including a recording device for recording the communication at the local level, and a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network, and operative to route voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network to the recording device.

There is further provided, according to another preferred embodiment of the

present invention, a telephone communication system providing communication between a multiplicity of telephone instruments, a PSTN, and a computer network, the system including a digital telephone switch controller interfacing with a computer connected to the computer network, and an adapter interfacing with a local telephone instrument and a PSTN, wherein the adapter is a PC card.

Still further in accordance with a preferred embodiment of the present invention, the digital telephone switch controller includes a slot for a PC card.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the invention and to show how the same may be carried into effect, reference will now be made, purely by way of example, to the accompanying drawings in which,

Figure 1 shows a network operative in accordance with the present invention;

Figure 2 shows another network operative in accordance with the present invention;

Figure 3 shows a plurality of telephones connected to a single computer, in accordance with a further embodiment of the present invention;

Figure 4 is a flow diagram of a method of operation of an embodiment of the present invention;

Figure 5 is a simplified functional block diagram of a telephone communication system providing communication between conventional telephone instruments, a PSTN and a computer network, constructed and operative in accordance with a preferred embodiment of the present invention;

Figure 6 is a simplified functional block diagram of a preferred implementation of the media signal gateway of Figure 5, constructed and operative according to a preferred embodiment of the present invention;

Figure 7 is a timing diagram illustrating the responses of telephone equipment under the control of the media and signalling processor of Figure 5;

Figure 8 is a timing diagram illustrating the responses of a PC under the control of the media and signalling processor of Figure 5;

Figure 9 is a simplified flowchart of a preferred method for the operation of the digital telephone and media switch controller of Figure 5, allowing a user to manually dial either PSTN or IP calls;

Figure 10 is a simplified flowchart illustrating a preferred mode of operation of the IP translation mechanism of the digital telephone and media switch controller of

Figure 5,

Figure 11 is a simplified functional block diagram of a VoIP (voice over IP) engine system providing communication between conventional telephone instruments, via a data network, constructed and operative in accordance with a preferred embodiment of the present invention; and

Figure 12 is a simplified flowchart illustrating a preferred method for selecting a client according to a predefined rules set, performed by the digital telephone and media switch controller of Figure 5.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a network operative in accordance with a preferred embodiment of the present invention.

A telephone 10, which produces analog signals, is preferably connected to an adapter 12. The adapter 12 preferably translates those analog telephone signals into digital data so that the telephone can be connected via the adapter 12 to a standard computer 16. The adapter thus allows an ordinary telephone to appear as a peripheral device to a computer. The computer 16 in turn may be connected to a computer network such as a company LAN, WAN, or the Internet.

Preferably the adapter not only translates the data into analog signals but also arranges the data into packets with address information. Address information is of two forms. Firstly there is address information of a target address that the device wishes to communicate with. As the telephone 10 is a standard telephone it is unable to provide Internet addressing information in the standard format because individual alphabetic characters are not provided on a standard telephone keypad. It is however possible to input a full numerical IP address or a short code which is used in a lookup table 14 to generate an address recognizable to the Internet, or for that matter any other network that may be in use.

The look-up table 14 may be located in the adapter 12 or it may be located in a computer 16 to which the adapter is connected. The computer may be equipped with a modem 18 or network card and is preferably capable of running the necessary protocols to communicate via the network. In the case of the Internet this means that the computer is preferably able to run the TCP/IP protocol, for example, and will be able to connect to an Internet host 20 via the telephone network 22.

The Internet is able, in the standard manner, to determine from the address information how to direct the data packets received from computer 16 over the Internet 24 to the correct host 26 of the called party. The host 26 is either already in contact with the computer 28 of the called party or, in a further embodiment, it makes contact via the local telephone network 30. The signal is preferably relayed from the computer 28 to an adapter 32 of the called party, where it is preferably converted into analog signals and is

thus made available to telephone 34.

It is noted that the invention does not require both parties to the conversation to have a telephone connected to an adapter of the invention. It is possible for the calling party to have a computer with standard Internet telephone equipment, sound card and software. In this case adapter 32 of the called party need only be provided with software that allows it to deal with sound files of a format produced by the sound card of the calling party. It is also possible, if the calling party has a telephone connected to an adapter according to the invention which itself has access to the public telephone network, PSTN, for the called party simply to have an adapter and telephone without being connected to any computer network. Thus the calling party is preferably able to utilize spare capacity on the network and is nevertheless able to communicate with people not having a presence on that network.

If the network to which the calling party is connected is the Internet and the called party does not have an Internet connection the table 14 preferably indicates a remote Internet host that is located physically close to the called party, that is to say, preferably a local phone call away. The table preferably further provides a phone number so that the remote Internet host can dial and thus a long-distance or international phone call can be made for the price of two local phone calls.

Figure 2 shows a local network, such as a company Intranet. A plurality of telephones 40 are connected via a plurality of adapters 42 to a plurality of computers 44. The computers are all linked together via a LAN or WAN of any appropriate type. A server 46 is provided which links the LAN to the Internet and the telephone network.

At present many organizations have WANs of one sort or another linking various sites. However the WAN is rarely used for voice communication between various sites because the computers are not all equipped with sound cards. Thus voice communication has to use the telephone network and spare bandwidth on the WAN is wasted. However, in preferred embodiments of the present invention a sound card is not necessary, neither is the purchase of a dedicated microphone and speakers. All that needs to be done is to connect an existing telephone set, via an adapter of the present invention, to a computer on the network and voice communication via the computer is

rendered possible.

Figure 3 shows how more than one telephone 10 may be connected to a single adapter 12. The adapter preferably has more than one port to which a telephone lead may be attached. Each port typically has a unique address, which is used in preparing headers for packets of data issuing from that port. Thus data packets produced by the adapter can be sent by computer 16 out to the Internet without the computer needing to know about the fact that different packets come from different telephones. Similarly incoming packets, because they include the port address, can be directed to the correct port on the adapter without any difficulty and without interfering with conversations being conducted via the other telephones.

Figure 4 is a flow diagram of a preferred method of operation of the adapter 12. In step 50 the adapter identifies the start of a call. It is sensitive to the tones or pulses used in dialing and records the digits being dialed. The dialed digits are taken to be address information 55. The format of the dialed information is checked in step 60 and if it is found to be in IP address format then that is used directly to address the data packets. If not then the lookup table is used in step 65 to translate into an IP address.

In step 70 a source address is prepared. The source address includes the IP address of the calling party and also, in the case of multiple telephone ports on a single adapter, the address of the port from which the conversation is being sent.

Once the address information is completed and a connection is established, the adapter has the task, step 75, of digitizing the conversation itself. The digitized conversation is arranged in the aforementioned data packets, step 80, and is output to the computer in step 85 as data packets ready for the TCP/IP protocol or the like.

In a preferred embodiment of the present invention the part of the operation carried out by the computer can also be carried out internally within the adapter so that the telephone does not need to be connected to a computer. In this case the only additional ability that the adapter typically employs is the processing power to support TCP/IP and to carry out the functions of a modem. Also the lookup table 14 is preferably stored internally of the adapter. As an alternative to storing the lookup table 14 internally of the adapter it is possible to have the lookup table 14 stored on a

computer to which the adapter has access.

In an adapter having more than one telephone port, a preferred embodiment is able to recognize the address of another of its own ports when dialed. Thus a conversation between two telephones connected via the same adapter is possible.

An advantage of a preferred embodiment of the present invention is that a standard telephone can utilize qualities of the computer or of the network. For example the computer, or adapter may have encryption software. The encryption software may be any encryption software and may include software that is used for encryption over the telephone network or any software that is used for encryption over the computer networks such as the Internet. Encryption standards that may be used include, for example, one-way hashed protocols such as MD5 and two-way hashed protocols based upon DES.

It is also possible, through use of the appropriate software, to ensure that the appropriate packets are delivered to more than one address. Thus the source telephone acts as a multicast or broadcast system. It is also possible to provide software to support conference calling; that is to say, there is provided exchange management software for managing different types of telephone call. At present the software for doing this is generally located in a costly telephone exchange device.

Reference is now made to Figure 5 which is a simplified functional block diagram of a telephone communication system 90 providing communication between conventional telephone equipment, a PSTN 110 and a data network 120, the system being constructed and operative in accordance with a preferred embodiment of the present invention. The data network 120 may for example comprise the Internet or an intranet.

The system 90 of Figure 5 typically interfaces with PSTN 110 as a normal subscriber via a DAA (direct arrangement access) unit 130 which may for example comprise a K951C and K592C chip set DAA unit commercially available from Krypton Isolation, Pleasanton, CA, USA. Preferably, a PSTN/system switch 150 is provided which provides selective engagement of the telephone equipment 100 with either the system 90 or the PSTN 110. The DAA unit 130 and a ringing SLIC (subscriber line

interface circuit) unit 140 preferably feed into a media signal gateway 160 (described in detail in Figure 6), an echo control unit 175, a codec 165, a digital signal processor (DSP) 170, a media and signalling processor 180, and finally to a digital telephone media and switch controller 190 via an interface 200, such as an RS232, USB, parallel port, wireless connection, PC card, PCMCIA etc., generating a dual purpose link (media and control) between itself and the digital telephone media and switch controller 190. It is appreciated that in a preferred embodiment, interface 200 may not interface with a PC, but may comprise a proprietary interface with a standalone microprocessor, such as a digital telephone switch.

The digital telephone media and switch controller 190 is typically connected to the data network 120 via a physical interface 195 which may, for example, comprise a BCM4502 interface unit commercially available from Broadcom Corporation, Irvine, CA, USA, which is suitable for Ethernet use. The physical interface 195 may alternatively comprise an interface suitable to connect to one or more of the Internet, Ethernet, ATM, power line, HPNA (two wire telephone line), GSTN (general switch telephone network, such as DSL, frame relay, ISDN, analog etc.), wireless connection, infra red connection, cable TV etc.

The ringing SLIC 140 may for example comprise an STLC3055, unit commercially available from SGS Thompson Microelectronics, San Jose, CA, USA.

Codec 165 may for example comprise an MC145480 codec unit commercially available from Motorola Semiconductors, Irvine, CA, USA.

Digital signal processor 170 may for example comprise an ACA481xx unit commercially available from Audiocodes Communications, Yehud, Israel.

Echo control unit 175 may, for example comprise a MH88524 echo cancellation unit commercially available from Mitel Semiconductors, Kanata, Ontario, Canada.

Media and signalling processor 180 may for example comprise an AT90S8515 microprocessor commercially available from Atmel Corporation, San Jose, CA, USA. A simplified illustration of a preferred implementation of the media and

signalling processor 180 is described with reference to Figures 7 and 8.

In a preferred embodiment, the device 85 may comprise the adapter 12 of Fig. 3; and the digital telephone media and switch controller 190, and the physical interface 195 are located within the PC 16 of Fig. 3.

Typically, a sensor array 210 is provided between the media signal gateway 160 and the media and signalling processor 180, the sensor array 210 typically comprising a DTMF (dual tone multi-frequency) sensor 220 and a caller ID sensor 230. Alternatively, the sensor array 210 may be omitted and the functionality of the sensor array 210 may be integrated into the functionality of digital signal processor 170.

DTMF sensor 220 may for example comprise an MT8070 DTMF receiver commercially available from Mitel Semiconductors, Kanata, Ontario, Canada.

Caller ID sensor 230 may for example comprise an MT88e45 caller ID receiver commercially available from Mitel Semiconductors, Kanata, Ontario, Canada.

The codec unit 165 is typically operative to convert digital signals to analog signals, and analog signals to digital signals. The echo control unit 175, which preferably comprises a standard 2 wires to 4 wires echo cancellation unit functionality, typically clears analog signals and eliminates echo therefrom. The DSP 170 typically performs echo control on digital signals, however the echo control unit 175 may be omitted and the analog echo control functionality of unit 175 incorporated into the DSP 170.

In the illustrated embodiment, the telephone equipment 100 typically comprises a non-cellular telephone instrument, however, alternatively, a cellular telephone instrument may be employed in which case suitable modifications are made to the system of Figure 5 to take into account the precise cellular communication interface and protocol. In an alternative embodiment the telephone equipment 100 may comprise complementary telephony equipment, such as a caller ID unit, a FAX or a modem.

Reference is now made to Fig. 6 which is a simplified functional block diagram of a preferred implementation of media signal gateway 160.

The media signal gateway 160 preferably comprises a real time analog mixer

235 operative to control the direction of flow of analog signals to and from the media signal gateway 160. Control over the three switches 240 typically allows the real time analog mixer 235 to receive and transmit analog signals from any of three different sources: the PSTN 110 via DAA 130; the telephone equipment 100 via the ringing SLIC 140; and the data network 120 via the codec 165.

The real time analog mixer 235 is preferably operative to eliminate one or more of the analog signals while keeping the amplitude constant by using a method such as an automatic gain control (AGC) method. The real time analog mixer 235 is also preferably operative to transfer voice information to the sensor array 210.

The media signal gateway 160 preferably also comprises a real time digital mixer 245 operative to control the direction of flow of analog signals to and from the media signal gateway 160. The real time digital mixer 245 is preferably operative to receive and transmit digital control signal information to and from telephone equipment 100 via the ringing SLIC 140; the PSTN via the DAA 130; and the data network 120 via the codec 165. The real time digital mixer 245 is also preferably operative to receive and transmit digital control signal information to and from the PSTN/system switch 150.

Reference is now made to Figures 7 and 8 which are timing diagrams illustrating the responses of telephone equipment and a PC, respectively, under the control of media and signalling processor 180.

T1 is the minimum interval to hold TXD line low for causing a break condition: 87 μ sec. (10 bits).

T2 is the minimum guard time from end of break condition to the start of command/acknowledge transmission: 8.7 μ sec. (1 bits).

The media and signalling processor 180 preferably accepts any command that may be sent from the PC during a response procedure, but typically remains in a Break condition until an Acknowledge command is sent from the PC. If the PC does not respond to a Break signal within approximately 5msec, the processor 180 typically returns to Mark, and tries again to signal with Break to the PC, typically every approximately 5msec.

Thus the transfer time is typically: Command from PC = 4 – 5 bytes., and Response from S-Phone = 7 – 8 bytes, i.e. a total of 11-13 bytes.

The terms 'Break', 'Mark' and 'Acknowledge' are used with reference to the standard terminology for a RS 232 interface.

A preferred format for the Commands/Responses is as follows:

All commands/responses, except Acknowledge response, are in the following format:

<prefix> <command/response> [parameter]

? <prefix> - start of command, (ASCII 10H).

? <command/response> - Command/Response byte.

? [parameter] - optional – extra byte for extended Commands/Responses.

The Acknowledge response format is preferably as follows:

One byte, saving transmission time:

<acknowledge> - ASCII 06H.

Command/Response byte:

Ext.	CR ₆	CR ₅	CR ₄	CR ₃	CR ₂	CR ₁	CR ₀
------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------

Ext. : 1 = Extended command/response. The command is followed by a parameter.

CR₀₋₆ : Command/Response code bits.

A preferred frequency/tone detection method using square wave input, typically employed by the media and signalling processor 180 is now described. This method preferably can be used in digital MPUs, can be used for detection of single frequency tones, and can be used to identify voice presence from other coherent signals on a phone line. It preferably also identifies US dual tones as a single frequency tone with a higher error rate.

Preferred parameters include:

Low_F: lowest frequency to detect, used to identify silence.

ERROR: maximum difference typically allowed between two following square waves.

LowTone: low boundary for a tested tone frequency range.

HighTone: high boundary for a tested tone frequency range.

Ntone: number of consistent waves in the frequency range of the tested tone to determine tone detection.

Nvoice: number of inconsistent waves to determine voice detection.

ToneCounter: counter for NTone consistent waves in the frequency range of the tested tone.

VoiceCounter: counter for Nvoice inconsistent waves.

$F1 > 1/\text{Low_F} ? \text{ ----> tone detected: silence. Reset all counters.}$

$|F1 - F2| \geq \text{ERROR} ? \text{ ----> VoiceCounter ++ Reset all other tone counters.}$

$\text{VoiceCounter} = \text{Nvoice} ? \text{ ----> tone detected: voice. Reset all counters.}$

$1/\text{HighTone} \leq F1 \leq 1/\text{LowTone} \text{ ----> ToneCounter ++ Reset all other tone counters, exclude VoiceCounter.}$

$\text{ToneCounter} = \text{NTone} ? \text{ ----> tone detected: tone. Reset all counters.}$

Returning now to Figure 5, the digital telephone media switch controller 190 may, for example, comprise a suitably programmed personal computer. Alternatively, the digital telephone media switch controller 190 may, for example, comprise a suitably programmed microprocessor, which is not a PC. A simplified flowchart illustration of a preferred program for the controller is described in Figures 9, 10 and 12.

In one embodiment of the present invention the user of the system, when making a telephone call, is able to manually switch between dialing via IP or PSTN.

Figure 9 is a simplified flowchart of a preferred method for the operation of the digital telephone and media switch controller 190 of Figure 5, allowing a user to manually dial either PSTN or IP calls. When the handset is taken 'off-hook', step 300,

or any equivalent step which is typically the prelude to dialing from the telephone equipment 100, the device typically switches to a default state. The default state is preferably user-defined during configuration, and in this embodiment the default state is either IP or PSTN.

All user-defined configuration of the system of the present invention preferably occurs upon first use, however reconfiguration may be performed at any time. Configuration typically is via a set-up screen on a PC, however configuration may alternatively occur via DTMF via the telephone equipment 100.

If the default line is IP (yes at step 310), the digital telephone switch controller 190 preferably switches to an IP line (step 320). Typically, upon switching to an IP line, the device 85 transmits a dial-tone signal (step 320) to the telephone equipment 100, until a keypad button is pressed. In response, the media and signal processor 180 typically receives DTMF signalling (step 330), from the telephone equipment 100, via the ringing SLIC 140, the media signal gateway 160, and the sensor array 210. The media and signalling processor 180 typically either translates the signals to commands, which commands are transmitted to the switch controller 190, or media and signalling processor 180 transmits the signals directly to the digital telephone switch controller 190 where they are translated.

If the default line is not IP (no at step 310), then the switch controller 190 typically switches to a PSTN line (step 340), and receives the DTMF signal (step 330). Typically, upon switching to a PSTN line, the device plays the central office's (CO's) dial-tone until the user begins to dial.

If the user presses (step 350) a configurable 'Line Switching Digit' before any other digit (e.g. '#' by default), the device preferably switches to the other line, i.e. from PSTN to IP, or from IP to PSTN.

If a user starts dialing on a PSTN line beginning with any digit other than the predefined 'Line Switching Digit' (step 360), then the PSTN call is typically dealt with in the normal fashion.

It is appreciated that since all digits, including the 'Line Switching Digit', are

transferred directly to the PSTN line when switched to it, the 'Line Switching Digit' is preferably selected to be a digit that does not have a special meaning to the CO or private branch exchange (PBX) to which the system is connected.

If a user starts dialing on an IP line (step 370) beginning with any digit other than the predefined 'Line Switching Digit', the digits are typically collected and stored in a buffer (step 380) until the user dials the 'Send' digit (e.g. '#'). Once the 'send' digit has been entered, the collected digits (i.e. a telephone number) are preferably transferred to the IP translation mechanism to determine how to dial them (step 390).

A call dialed over an IP line is typically of the type PC-to-PC, or PC-to-Phone. It is appreciated, however, that while one preferred embodiment of the invention is described herein with reference to PC-to-PC or PC-to-Phone calls, the present invention applies equally to calls of the type net-to-PC, PC-to-net, net-to-net, or net-to-phone.

To determine the type of call and the dialing mechanism preferably utilized, the method of Figure 10 is preferably employed.

Figure 10 is a simplified flowchart illustrating a preferred mode of operation of the IP translation mechanism of the digital telephone and media switch controller 190, corresponding to step 390 of Fig 9.

If the number dialed by a user over an IP line begins with a pre-defined digit, i.e. "PC2PCPrefix", (e.g. '*' by default; step 410), it is preferably dialed as a PC-to-PC call (step 420). In this case the dialed number is preferably translated to an IP address. The predefined digit PC2PCPrefix is preferably user-configurable, via software.

A preferred translation mechanism is now described:

If the number is a valid IP address 430 (e.g., 139.92.184.76) the number is typically dialed using an engine such as a VoIP engine (step 440). As conventional telephone equipment does not have a button for a dot '.', the dots are typically represented by an asterisk '*'.

A VoIP engine (described below with reference to Figure 11) typically

comprises the following functions: signalling protocols such as H.323, MGCP and SIP; and voice compression and echo cancellation functions, preferably allowing the engine to receive and transmit voice packets.

If the number is a short number, typically in the range of 0-255 (step 450), the number is typically considered as an IP/PBX or network/PBX extension, and is combined with a pre-defined mask, configurable by software (e.g. "10.0.0"), to make a valid IP address (step 460), and dialed (step 440).

If the number is not a valid IP address, and the number is not a short digit in the range of 0-255, the number is preferably transferred to a mechanism such as Mirabilis ICQ as an ICQ# for translation into an IP address (step 470), and dialed (step 440).

If the above procedure does not yield a valid IP address the number is deemed to be illegal, and a reorder tone is typically transmitted to the telephone equipment 100.

A preferred method for connecting phone calls over an IP network, using a VoIP engine (step 440) is now described with reference to Figure 11, which is a simplified functional block diagram of a VoIP (voice over IP) engine system providing communication between conventional telephone instruments, via a data network, constructed and operative in accordance with a preferred embodiment of the present invention.

Device A, while connected to data network 120, preferably sends a message containing its personal ID and IP address to all other devices connected via the data network 120, i.e. devices B and C. At least once in each predefined period, which is typically up to about 30 seconds, device A preferably sends a 'keep alive' message to the data network 120. Each device connected to data network 120 that received the message from device A, preferably, in return, send their personal details and IP address to device A. At least once in each predefined period, which is typically up to about 30 seconds, all other devices, i.e. devices B and C, preferably send a 'keep alive' message to the data network 120. Each device is thus preferably operative to store details of other connected devices in a 'connected' list in its memory, enabling that device to know

which other devices are connected and which are not connected. When one of the devices does not send a keep alive period within a certain period the other devices typically delete this device from the connected list.

A preferred method of making a phone call via this engine is now described.

A local phone user picks up the handset of telephone equipment 100 and waits for a dial tone. In the absence of a dial tone the user typically hangs up the phone, and waits for a dial tone. If the user receives a dial tone he typically dials the number of a remote user using the telephone keypad, followed by an "end of number" key, e.g. "#". The device 90 preferably translates the number to an IP address taken from a preprogrammed table containing telephone numbers and their related IP addresses. This table is typically updated from the information which was received from other devices connected to the data network. Telephone numbers are preferably constant in this table, even if the IP address and details changes.

If the number is not valid, i.e. not in the list, a reorder tone is preferably sent to the local phone. If the remote user is busy, a busy tone is preferably sent to the local phone. If the remote user answers, voice packets are preferably transferred over the data network from the local user device to the remote user device, and *vice versa*.

When one of the parties unhooks the phone, a termination signal is preferably sent to the other party and the session ends. Both parties are then typically ready to create or receive a new phone call.

Referring back to Figure 10, if the number does not begin with the "PC2PCPrefix", it is typically dialed as a PC-to-Phone target (step 490). Dialing is typically performed using one of a list of PC-to-Phone clients supported by the software (e.g., Net2Phone, Delta-Three, etc.). To determine which client is used, a PC-to-Phone Dialing-Rules mechanism is preferably utilized.

The software setup of the digital telephone and media switch controller 190 preferably contains a Dialing-Rules wizard enabling the user to define a set of rules for dialing PC-to-Phone targets. The client to be used is preferably selected according to the predefined rules set, in a procedure described with respect to Figure 12.

If there is a rule such as "Dial ALL calls using X client" 500, which typically supersedes all other rules, then the call is made using X client (step 510).

A number is typically tested to see whether it begins with an international code (step 520). If the number does not begin with an international code, it is typically defined as a local call 530. In the presence of a rule such as "Dial calls within my country using Y client" 540, then if the target is local ('yes' at step 535), the call is preferably made using Y client (step 550).

If the target is not local ('no' at step 535), and a PC-to-Phone client, Z, has been designated for that particular target country (step 560), the phone call is preferably made using Z client (step 570).

In the absence of a rule designating a particular client for the particular target country 560, then in the presence of a rule such as "Dial countries NOT in the list using W client" 580, the call is preferably made using W client (step 590).

If no rule matches the specified target, i.e. error 595, dialing is preferably stopped, and a reorder tone is typically played.

It is particular feature of a preferred embodiment of the present invention that the system is operative to record IP calls on the local level, preferably by the user's computer. It is appreciated that this recording can preferably be performed while using any IP-Client to make calls if the client is using a mechanism such as the Microsoft 'WAVE' mechanism (WIN32SDK/DDK, by Microsoft Development Network; www.microsoft.com) to handle audio streams.

Previous difficulties that existed in recording such a call included that the wave/in & wave/out drivers are used in a way opposite to their names, i.e. 'WAVE/OUT' is used to handle an incoming voice stream, while the 'WAVE/IN' driver is used to create the outgoing stream. Another major disadvantage was the fact that most wave-drivers do not allow for multiple instances, and so no other application can use a wave driver while in use by the IP Client.

The ability of the present invention to record IP calls on the local level, preferably by the user's computer, overcomes these prior disadvantages in the following

manner.

In a preferred embodiment, recording is achieved by adding a 'virtual' wave/in device to the device wave-driver. The virtual device acts as a standard wave device for the Microsoft MMSYSTEM mechanism (WIN32SDK/DDK, by Microsoft Development Network; www.microsoft.com), but is typically dependent upon the regular wave-driver for streaming.

When the device 85 is open and a call is in progress, there are typically two audio streams running, one for audio-out to the telephone equipment 100, via the device 85, and the other for audio-in from the telephone equipment 100.

Dual duplex digital recording is typically performed as described below.

The real time analog mixer 235 of media signal gateway 160 is preferably operative to mix analog data from the PSTN 110 and the telephone equipment 100. This mixed analog information is transferred, via echo control unit 175, into digital information by codec 165, processed by DSP 170, and the digitized information is transferred via the media and signalling processor 180 and interface 200 to the digital telephone switch controller 190. The digital telephone switch controller 190 typically mixes this digitized data with digital data signals from data network 120. The digital telephone switch controller 190 is preferably able to store the mixed digital data information, thus recording the telephone conversation at the local level.

The virtual wave-driver typically preferably hooks itself to both streams, and collects audio buffers (preferably in their raw-PCM format). When it has two such buffers (one for audio-in and one for audio-out), it typically mixes them to a single buffer (thus enabling the recording of a two-way call). The mixing is preferably performed via an AGC method to keep the energy level consistent when only one participant in a conversation is talking, i.e. when voice information is being transmitted in one direction from only one of the telephone equipment 100, the PSTN 110, or the data network 120. The joined buffer is typically transferred via the wave mechanism to the recording application.

In a similar manner, another wave-driver is preferably added for wave/out to

the IP call, enabling the injection of wave files onto the call. This preferably enables, for example, playing a "Call-Waiting" beep to inform the participants of a call, of a waiting call.

Several scenarios relating to the function of a preferred embodiment of the present invention are now described. The following scenarios are not meant to be limiting, and other scenarios are contemplated.

Scenario 1: Generating a call from the Telephone Equipment 100

A user picks up the handset of telephone equipment 100, or performs another action which initiates the call procedure. The ringing SLIC 140 preferably detects the telephone equipment 100 is 'off-hook' and preferably transfers the 'off-hook' signal to media and signalling processor 180 via media signal gateway 160. Media and signalling processor 180 preferably transfers a 'be ready to receive' signal to digital telephone media and switch controller 190, and media and signalling processor 180 preferably sends a dial tone to telephone equipment 100 via DSP 170, codec 165, echo control unit 175, media signal gateway 160 and ringing SLIC 140.

The telephone equipment 100 preferably sends DTMF sequence to media and signalling processor 180 via ringing SLIC 140, media signal gateway 160, DTMF sensor 220, which sequence is typically inputted by a user touching buttons on a keypad of telephone equipment 100, and typically ends with the 'end of sequence "#" key. Media and signalling processor 180 preferably transmits the DTMF sequence to digital telephone media and switch controller 190.

If the digital telephone media and switch controller 190 cannot translate the DTMF sequence to a valid IP address, a reorder signal is typically sent to telephone equipment 100 via media and signalling processor 180, media signal gateway 160 and ringing SLIC 140. If digital telephone media and switch controller 190 translates the DTMF sequence to a valid IP address it preferably sends a signal to the data network 120 that it intends to start a phone call. Digital telephone media and switch controller 190 typically receives one of several possible signals from data network 120

Upon receipt of a busy signal, digital telephone media and switch controller

190 preferably passes this to 180 to generate a busy signal at telephone equipment 100.

Upon receipt of a ringing signal, digital telephone media and switch controller 190 preferably passes this to media and signalling processor 180 to generate a ringing signal at telephone equipment 100.

Upon receipt of an answer, all other signals are preferably stopped and digital telephone media and switch controller 190 preferably opens a full duplex voice packet channel, forming an open channel from telephone equipment 100 to the media and signalling processor 180, via DSP 170 and sensor array 210.

Telephone equipment 100 can preferably send DTMF signals to digital telephone media and switch controller 190 via DTMF sensor 220, to operate commands from the other participant to the telephone communication.

If either telephone equipment 100 or the other participant to the call via the data network 120 hangs up, i.e. terminates the phone call, then digital telephone media and switch controller 190 preferably closes the voice packet channel. A signal is preferably sent to the other party that the first party has hung up.

Scenario 2: Receiving a call from the PSTN 110 during a pre-existing conversation between the data network 120 and telephone equipment 100

During a pre-existing telephone conversation between the a user connected via data network 120 and telephone equipment 100, media signal gateway 160 typically detects an incoming ringing signal and caller ID from the PSTN, via DAA 130, and preferably transfers it to media and signalling processor 180. Media and signalling processor 180 preferably sends the information to digital telephone media and switch controller 190, and if digital telephone media and switch controller 190 possesses a display, the caller ID is preferably displayed.

Media and signalling processor 180 preferably sends a 'beep' signal to telephone equipment 100, via DSP 170, codec 165, echo control unit 175, media signal gateway 160 and ringing SLIC 140, to notify the user of telephone equipment 100 that a call is waiting. The user of telephone equipment 100 typically decides whether to

accept the call or not.

If the user of telephone equipment 100 decides to accept the call from the PSTN, and hold the call from the data network 120, she typically pushes the '#' button on telephone equipment 100. This typically holds the call from the data network 120 and switches to the call from the PSTN 110. A signal is preferably sent to media signal gateway 160 via ringing SLIC 140, and from media signal gateway 160 to digital telephone media and switch controller 190 via media and signalling processor 180, to hold the call from the data network 120. Media signal gateway 160 preferably also sends a message to media and signalling processor 180 to allow the connection between telephone equipment 100 and PSTN 110 via DAA 130, media signal gateway 160 and ringing SLIC 140.

If the user of telephone equipment 100 decides to switch back to conversation with the user over the data network 120, she typically presses pushes the '#' button on telephone equipment 100 again, and the conversation switches back from the user over the PSTN 110 to the user over the data network 120 in the same way.

If one participant finishes a call, the user of telephone equipment 100 can switch back to the remaining remote participant by pushing the '#' button again.

If the user of telephone equipment 100 decides to accept the call from the PSTN 110, and join this call to the pre-existing conversation to form a three-way conference call, she typically pushes the '*' button on telephone equipment 100. This preferably sends a signal to media and signalling processor 180, which instructs media signal gateway 160 to mix analog signals from PSTN 110 via DAA 130, from telephone equipment 100 via ringing SLIC 140, and from the data network via codec 165.

To switch to conversation with only one participant of the three-way call, and not break the connection to the other participant, the user typically presses "#1" or "#2" to choose the desired channel, and the switching occurs as described above. To close one channel and to continue the conversation with the other channel, the user typically presses "#1" or "#2" to choose the non-desired channel, closes this channel and presses "#" to switch to the desired conversation.

Scenario 3: Receiving a call from the data network 120 during a pre-existing conversation between the PSTN 110 and telephone equipment 100

This scenario is typically as described above in Scenario 2 except as described. Telephone equipment 100 preferably generates a regular telephone call with the PSTN 110 via PSTN/system switch 150, hence avoiding the rest of the system. When a new call is received from data network 120 by digital telephone media and switch controller 190, a signal is preferably sent to media and signalling processor 180 to open a channel to transmit a call waiting 'beep' to telephone equipment 100.

Media and signalling processor 180 preferably sends a signal to media signal gateway 160 to "off-hook" the DAA 130, and then media and signalling processor 180 preferably sends a beep via DSP 170, codec 165, echo controller 175, to media signal gateway 160, and via DAA 130 and PSTN/system switch 150 to telephone equipment 100.

If the user of telephone equipment 100 chooses to accept the call, then the call route is preferably switched from the PSTN/system switch 150 route, to the route via ringing SLIC 140 and media signal gateway 160, thus allowing the media signal gateway 160 to control the calls as above.

Scenario 4: Telephone equipment 100 receiving a call from the data network 120

The present invention is preferably operative to receive communication from a data network 120. A telephone call is typically directed from the data network 120 via the device 85 to the telephone equipment 100, via the physical interface 195 and the digital telephone switch controller 190. The digital telephone switch controller 190 preferably receives the incoming message signal, and typically transmits a command signal via interface 200 to the media and signalling processor 180. This command signal typically instructs the media and signalling processor 180 to send a generate ringing voltage signal via the media signal gateway 160 and the ringing SLIC 140,

instructing the telephone equipment 100 to ring.

When the telephone equipment 100 is answered, a return signal is typically sent via the ringing SLIC 140 and media signal gateway 160 to the media and signalling processor 180, to the digital telephone switch controller 190.

The digital telephone switch controller 190 preferably opens a voice packet channel via the media and signalling processor 180, the DSP 170, the codec 165, the echo controller 175, the media signal gateway 160 and the ringing SLIC 140 to the telephone equipment 100. When one party hangs up the call is preferably terminated

If telephone equipment 100 is not answered after a predefined time period, a 'no answer' signal is preferably transmitted to the data network 120 by the digital telephone switch controller 190.

Scenario 5: Single line gateway between PSTN 110 and data network 120

Data network 120 typically sends a signal to the digital telephone switch controller 190, that it wishes to generate a phone call to the PSTN and typically sends the desired phone number. Digital telephone switch controller 190 preferably sends the request signal and information to the media and signalling processor 180. Media and signalling processor 180 preferably sends an "off-hook" signal, via media signal gateway 160 and DAA 130, to PSTN 110, i.e. it opens the line between itself and the PSTN 110.

Media and signalling processor 180 preferably detects the status of the PSTN from the progress tone sent back by the PSTN 110. The progress tone may comprise, for example, a dial tone, a busy tone, a 'message waiting' tone etc. If there is not tone, this typically means that the line is not connected. Media and signalling processor 180 preferably sends information regarding the progress tone to digital telephone switch controller 190.

If a dialing tone is detected, media and signalling processor 180 preferably sends the dialing sequence to the PSTN 110 via DTMF signals or by pulse dialing, i.e. a preset tone for a particular PSTN line. The media and signalling processor 180

preferably detects the PSTN line status again.

If the media and signalling processor 180 receives a busy signal from the PSTN 110, a signal is preferably sent to data network 120 via digital telephone switch controller 190 to hang up and repeat.

If the media and signalling processor 180 receives a ringing signal from the PSTN 110, a ringing signal is preferably sent to data network 120 via digital telephone switch controller 190.

If the telephone recipient from the PSTN answers, this is preferably detected by media and signalling processor 180, and a signal is preferably sent to digital telephone switch controller 190 to open a voice packet channel between data network 120 and PSTN 110.

When the media and signalling processor 180 detects that the PSTN 110 hangs up, i.e. terminates the call, a signal is preferably sent to digital telephone switch controller 190 which terminates the call and sends a signal to data network 120 to this effect.

In response to an external signal, typically from the PSTN 110 or the data network 120, the ringing SLIC 140 is preferably operative to act as a local ringing voltage generator, by locally applying single line ringing voltage to telephone equipment 100, thus inducing equipment 100 to produce a ringing tone. For example, a single line voltage generation actuation signal from the PSTN 110, is typically transmitted via the DAA 130, and the media signal gateway 160 to the media and signalling processor 180. The media and signalling processor 180, acting as a voltage generator actuator, preferably transmits the actuation signal via the media signal gateway 160 to the ringing SLIC 140, which preferably generates the voltage to cause the telephone equipment 100 to ring.

It is appreciated that the codec 165, the DSP 170 and the echo control unit 175 are typically only employed for voice processing functions, and not for control functions.

In another preferred embodiment of the present invention, the device (adapter) 85 is implemented on a PC card (PCMCIA), which is plugged into a laptop computer. In this embodiment, the digital telephone switch controller 190 preferably comprises a slot into which the PC card may be inserted. Two major difficulties have been overcome in the PCMCIA embodiment of this invention: size, and power supply.

All the components described herein are of sufficiently small size, and high efficiency power dissipation, to fit onto a standard PCMCIA card. For example, in a preferred embodiment where interface 200 comprises a PCMCIA interface, the power supply is typically the PCMCIA socket, and a DC to DC converter in the ringing SLIC 140 generates high ringing voltage to telephone equipment 100.

In one preferred embodiment, suitable for connecting telephone equipment 100 to a data network 120, and to a PSTN 110, the PCMCIA card is comprised all of the components of device 85.

In an alternative preferred embodiment, suitable for connecting telephone equipment 100 to a data network 120, and not to a PSTN 110, the DAA 130, the PSTN/system switch 150, and the caller ID sensor 230 are preferably eliminated from the PCMCIA card, and the PCMCIA card comprises all other components of device 85.

It is appreciated that the various features of the invention which are, for clarity, described in the contexts of separate embodiments may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment may also be provided separately or in any suitable subcombination.

In the appended claims the term "telephone" refers to a telephone suitable for attachment to the public switched telephone network, and includes telephones that produce an output in analog form and which produce tones or pulses in the widely recognized format for dialing and other purposes.

CLAIMS

What is claimed is:

1. An adapter comprising an analog to digital converter, for connecting a telephone set to a computer.
2. An adapter according to claim 1, further comprising a first output port configured as a telephone socket for attachment of a telephone plug.
3. An adapter according to claim 2 further comprising one or more additional output ports, likewise configured as telephone sockets and each having a unique address.
4. An adapter according to claim 1 further comprising a look-up table for translating numerical address information entered at a key pad of the telephone into addresses on the computer.
5. An adapter according to claim 1 further comprising a look-up table for translating numerical information entered at a key pad of the telephone into addresses on a network to which the computer is attachable.
6. An adapter according to claim 5 wherein the lookup table contains Internet addresses and wherein the computer is attachable to the Internet.
7. An adapter comprising an analog to digital converter, for connecting a telephone set to a computer network.
8. An adapter according to claim 7, further comprising a first output port configured as a telephone socket for attachment of a telephone plug.
9. An adapter according to claim 8 further comprising one or more additional output ports, configured as telephone sockets and each having a unique address.
10. An adapter according to claim 7 wherein the adapter contains a look-up table for converting numerical data entered at a keypad of the telephone into addresses

on the network.

11. An adapter according to claim 7 wherein the network comprises the Internet.

12. An adapter according to claim 11 comprising a module for operating an Internet protocol.

13. The use of a telephone as a peripheral device for a computer.

14. The use of a telephone according to claim 13 wherein the telephone is operatively attached to the computer via an adapter which is operable to convert digital signals output from the computer into analog signals for input to the telephone and to convert analog signals output from the telephone into digital signals for input to the computer.

15. The use of a telephone according to claim 13, for conducting voice communication over a network to which the computer is attached.

16. The use of a telephone as a peripheral device for a computer, the computer comprising control software for managing said telephone.

17. The use of a telephone according to claim 16 wherein the control software includes encryption software.

18. The use of a telephone according to claim 16 wherein the control software includes exchange management capabilities.

19. A telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, the system comprising:

a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to responsively transmit

at least one of voice information and signalling information to at least one of the local telephone instrument, the PSTN and the computer network.

20. A telephone system with local ringing voltage generation, the system comprising:

a local ringing voltage generator operative to locally apply single line ringing voltage to a telephone instrument, thereby to induce the telephone instrument to produce a ringing tone; and

a voltage generator actuator operative to actuate the local ringing voltage generator upon receipt of a single line voltage generation actuation signal from a remote public system telephone network.

21. A system according to claim 20 and also comprising a public system telephone network operative to send a voltage generation actuation signal to the voltage generator actuator which signal is incapable of directly actuating the telephone instrument to produce a ringing tone.

22. A method for setting up a conference call between three participants, the method comprising:

providing a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze signalling information and voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to responsively transmit at least one of voice information and signalling information to at least one of the local telephone instrument, the PSTN and the computer network; and

using the digital telephone switch controller to set up a conference call between the local telephone instrument, a remote telephone instrument, via the PSTN, and a remote subscriber to the computer network, via the computer network.

23. A method according to claim 22 wherein the controller receives digital voice

information from the remote computer network subscriber, via the computer network.

24. A method according to claim 22 wherein the controller receives analog voice information from the local telephone instrument.

25. A method according to claim 22 wherein the controller receives analog voice information from the PSTN.

26. A system according to claim 19 wherein said controller is operative to analyze signalling information and voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network.

27. A telephone communication system providing communication between a multiplicity of telephone instruments via at least one PSTN and at least one computer network, the system comprising:

a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to perform local least cost call routing of corresponding voice information to a remote telephone instrument.

28. A system according to claim 19 and wherein said switch controller is operative to mix voice information arriving from the local telephone instrument with voice information arriving from the PSTN.

29. A telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, the system comprising:

a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to analyze at least signalling information arriving from at least one of the local telephone instrument, the PSTN and the computer network and to route at least one of

voice information and signalling information accordingly.

30. A telephone communication system according to claim 29 and wherein said digital telephone switch controller comprises a slot for a PC card.

31. A telephone communication system providing communication between a multiplicity of telephone instruments via a PSTN and a computer network, and operative to record said communication at a local level, the system comprising:

a recording device for recording said communication at said local level, and

a digital telephone switch controller interfacing between a local telephone instrument, the PSTN and a computer connected to the computer network and operative to route voice information arriving from at least one of the local telephone instrument, the PSTN and the computer network to said recording device.

32. A telephone communication system providing communication between a multiplicity of telephone instruments, a PSTN, and a computer network, the system comprising:

a digital telephone switch controller interfacing with a computer connected to the computer network, and an adapter interfacing with a local telephone instrument and a PSTN, wherein said adapter comprises a PC card.

33. A telephone communication system according to claim 32 and wherein said digital telephone switch controller comprises a slot for said PC card.

ABSTRACT

An adapter is disclosed which allows attachment of a standard telephone to a computer as a standard peripheral. The adapter converts analog signals of the telephone to digital signals of the computer and vice versa. The adapter can also be a stand-alone device allowing the telephone to be attached to a computer network. The adapter, in this case, contains the computing power to support the necessary data network protocols, and PSTN signalling protocols.

In this way voice communication is enabled over a computer network without requiring the computers to be equipped with sound cards.

65,000" 090600

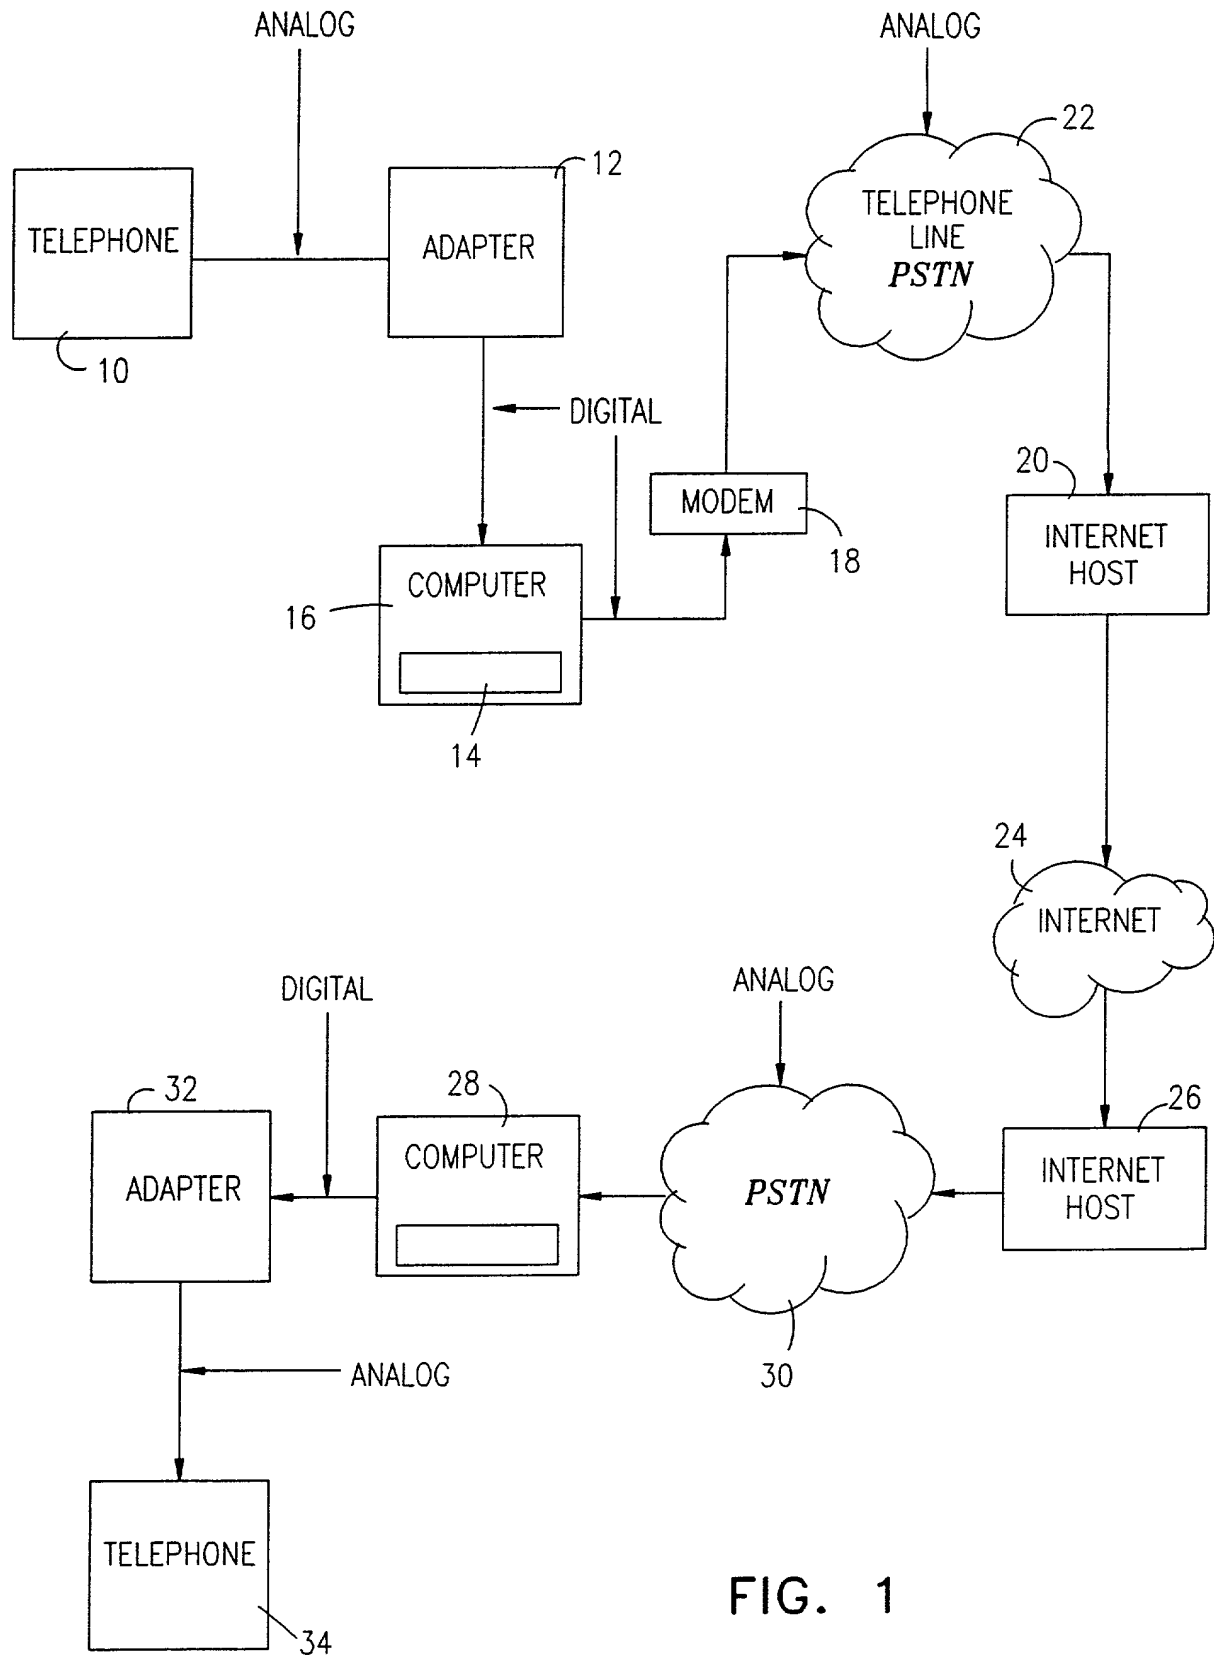


FIG. 1

66/000" 09926260

FIG. 2

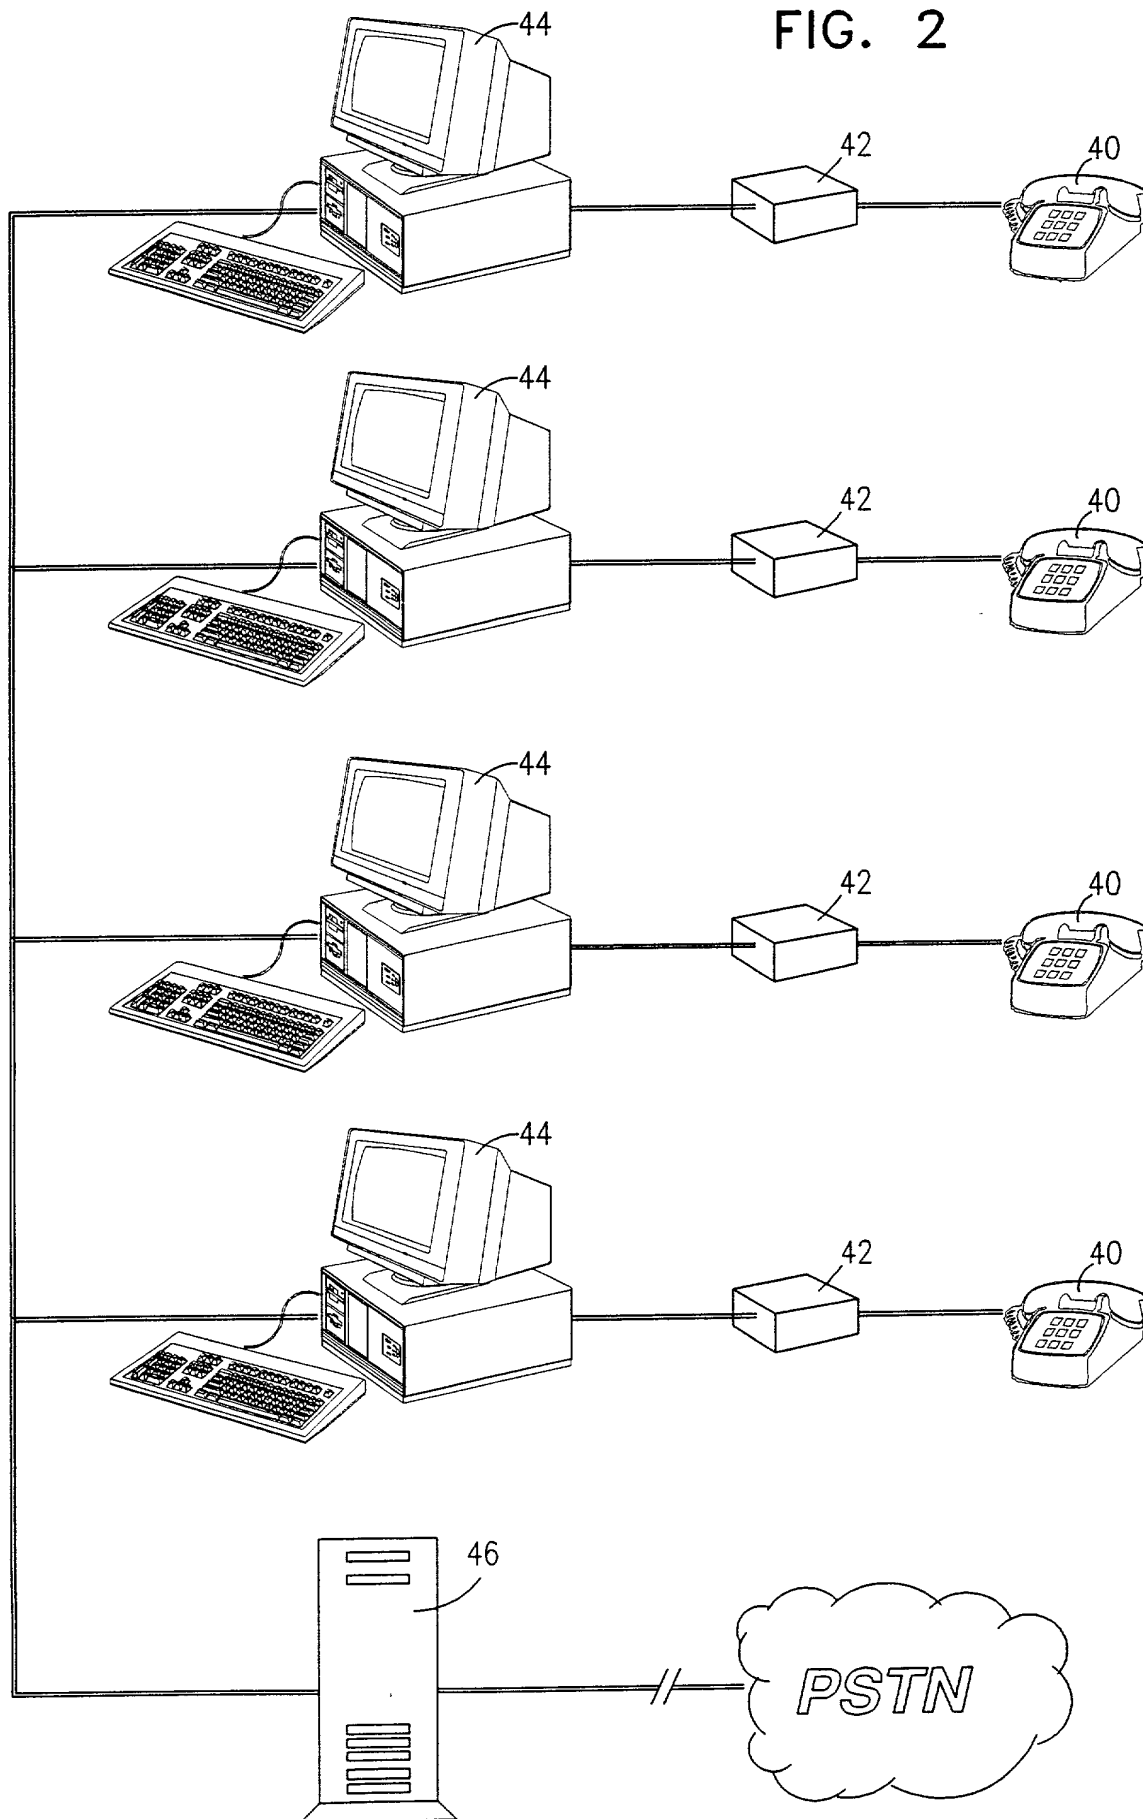


FIG. 4

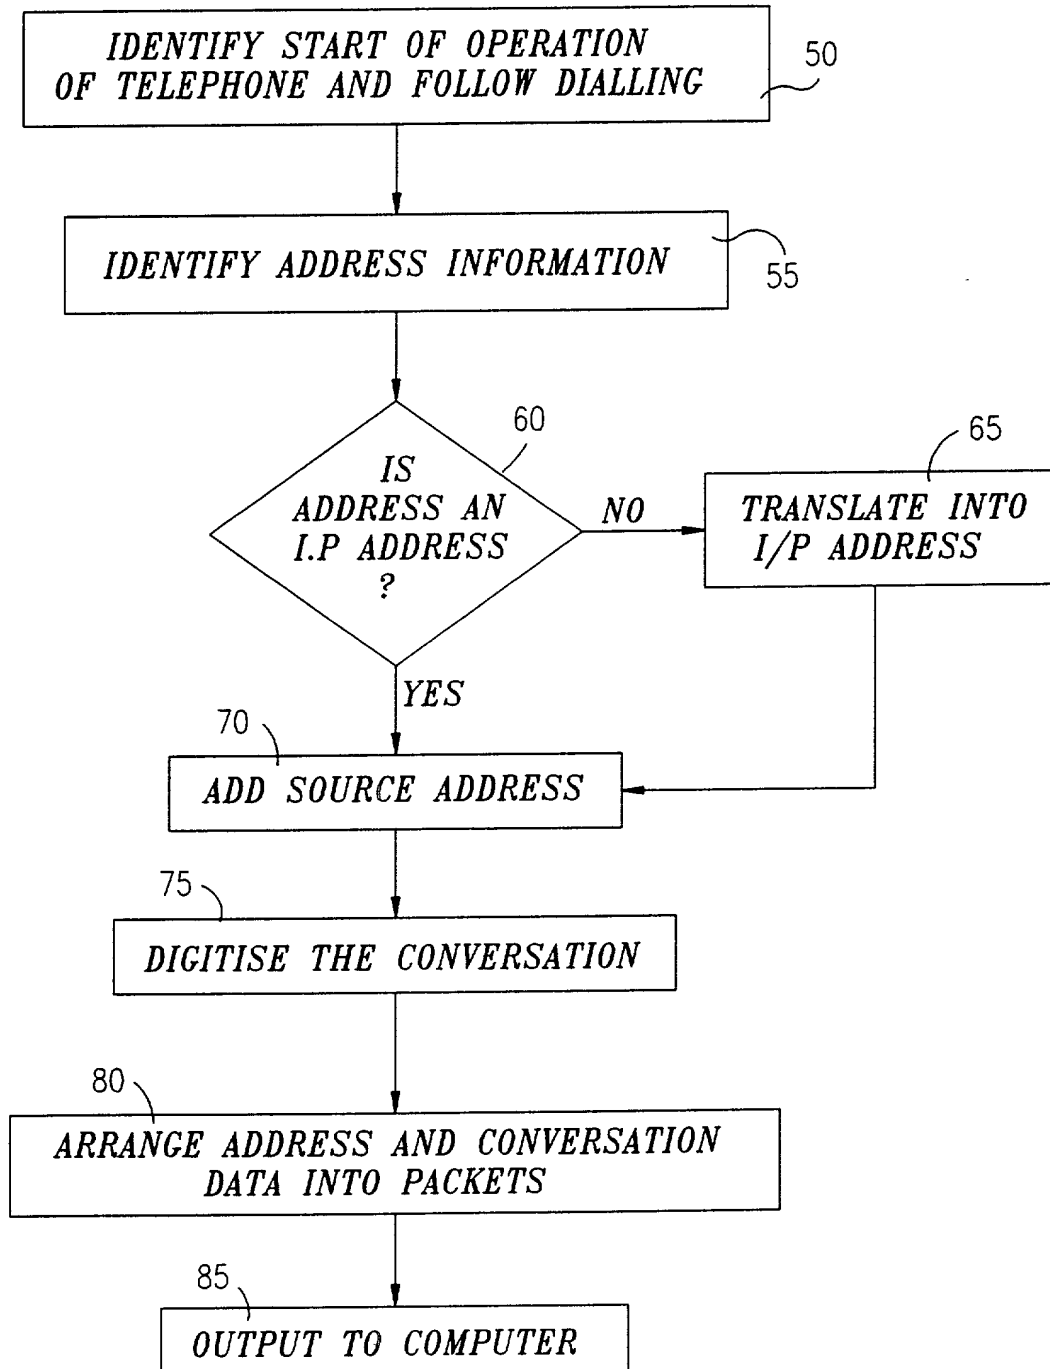


FIG. 5

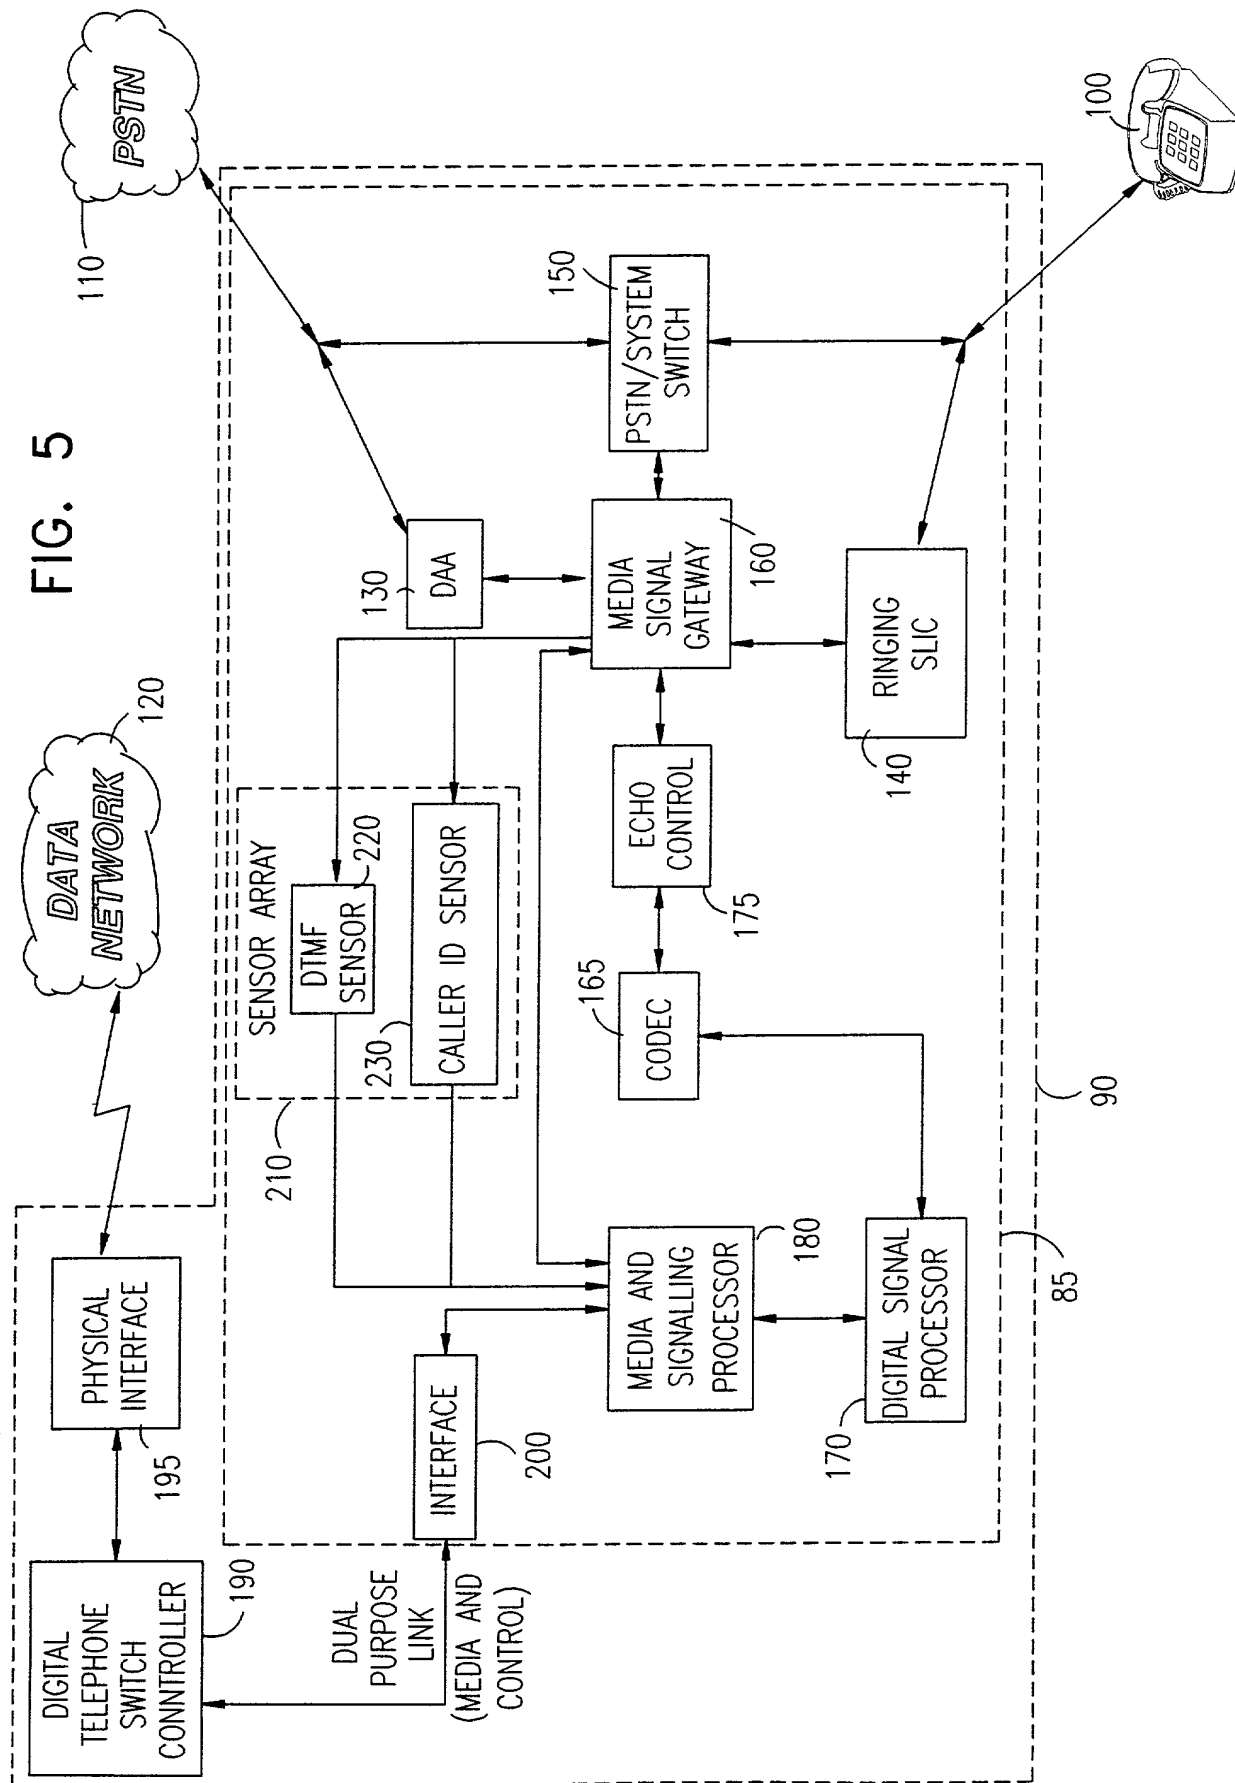


FIG. 8

Digital Telephone Switch Controller:

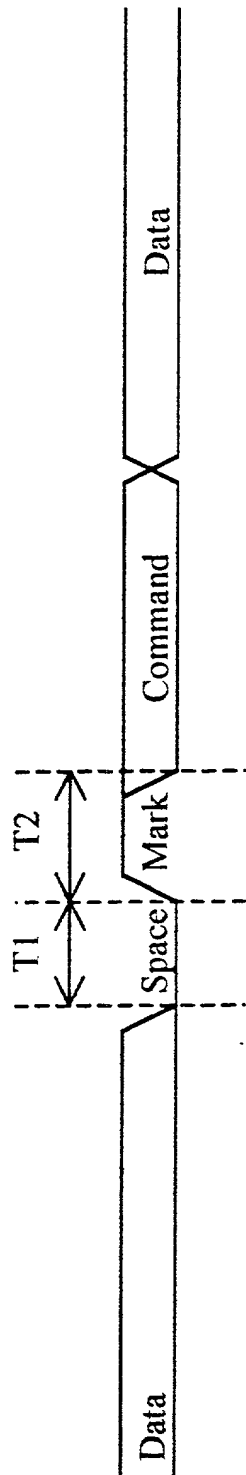


FIG. 9


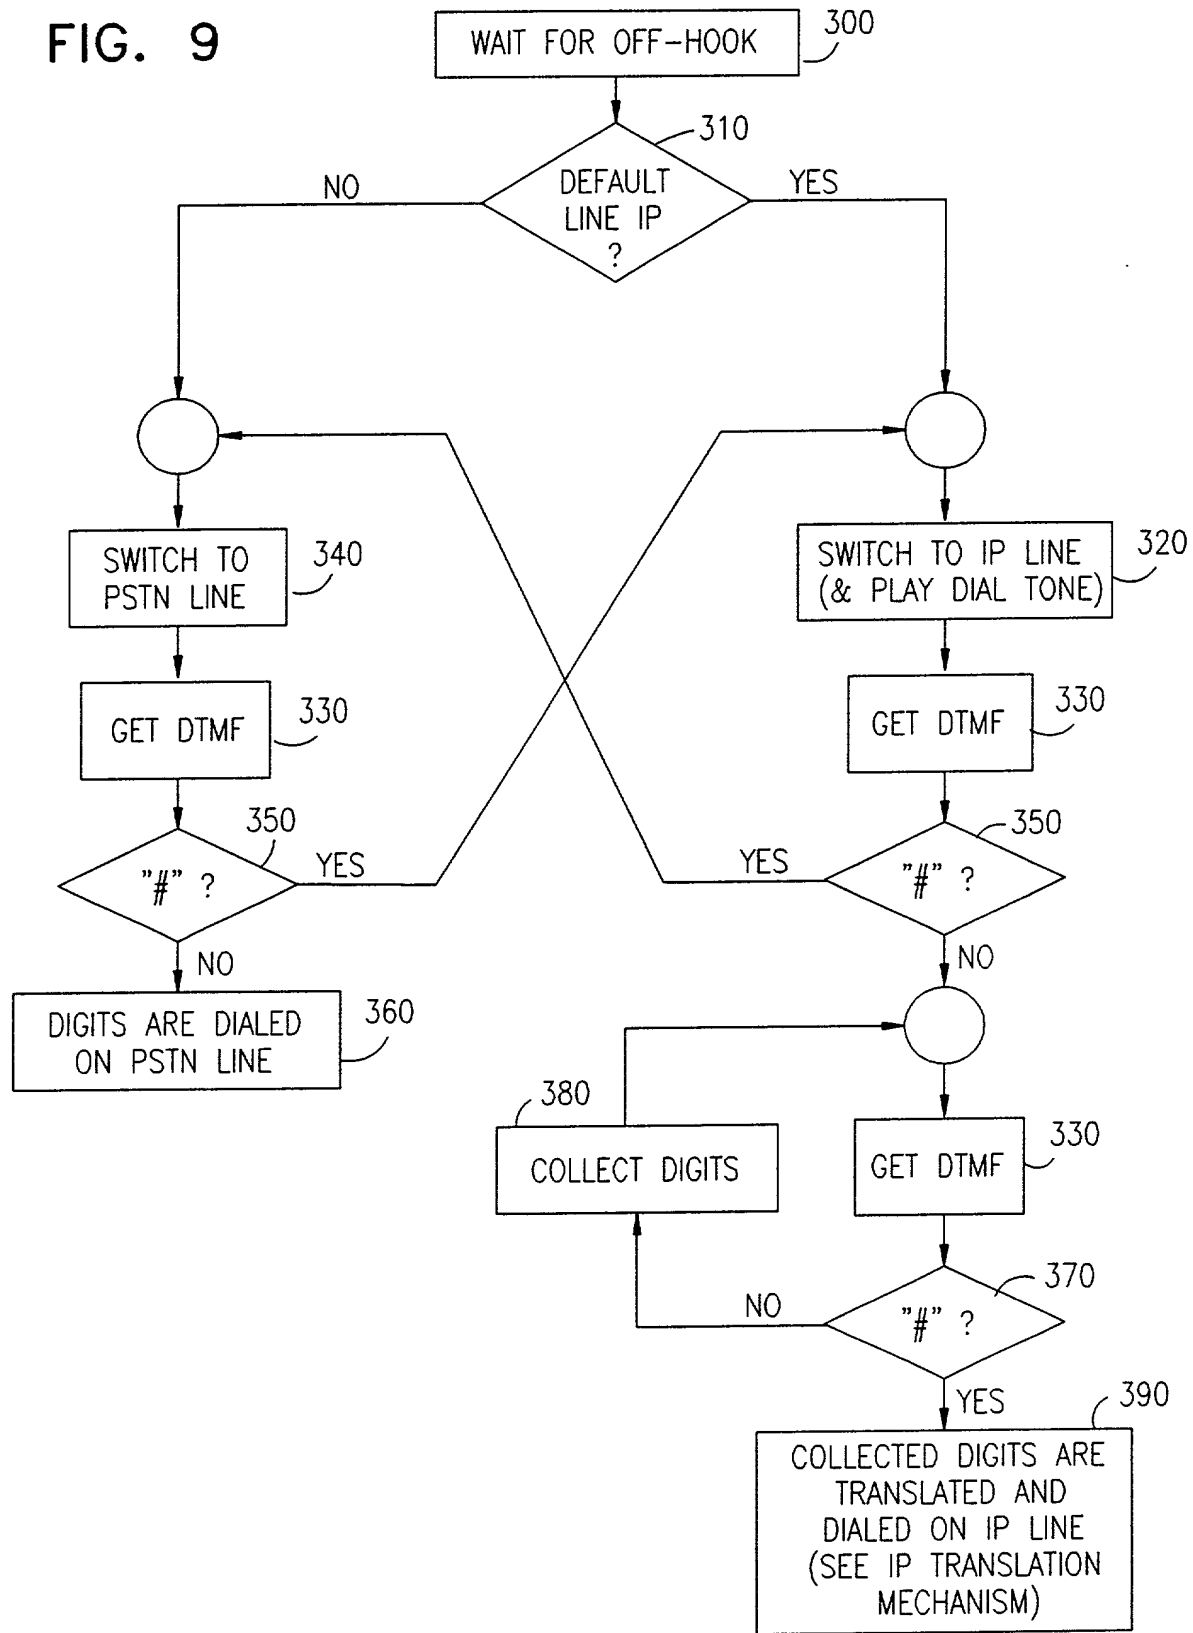


FIG. 10

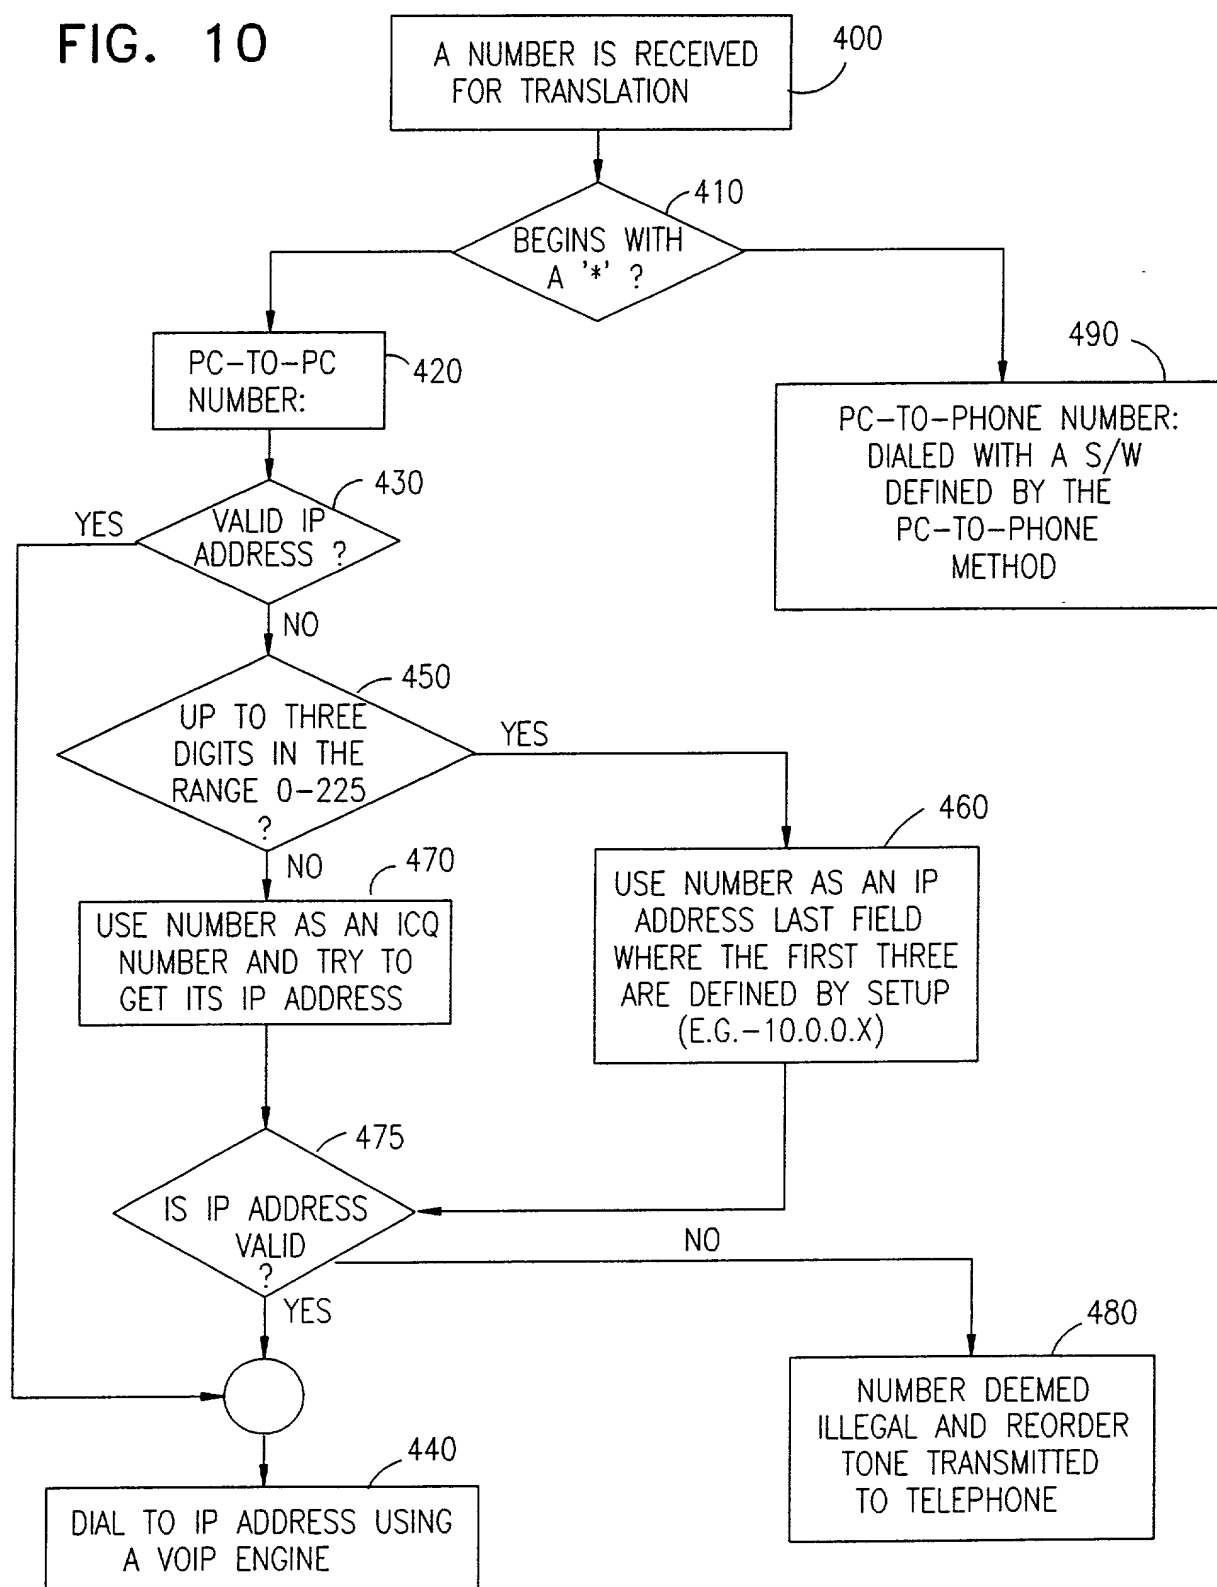

66/000" 09000000

FIG. 11

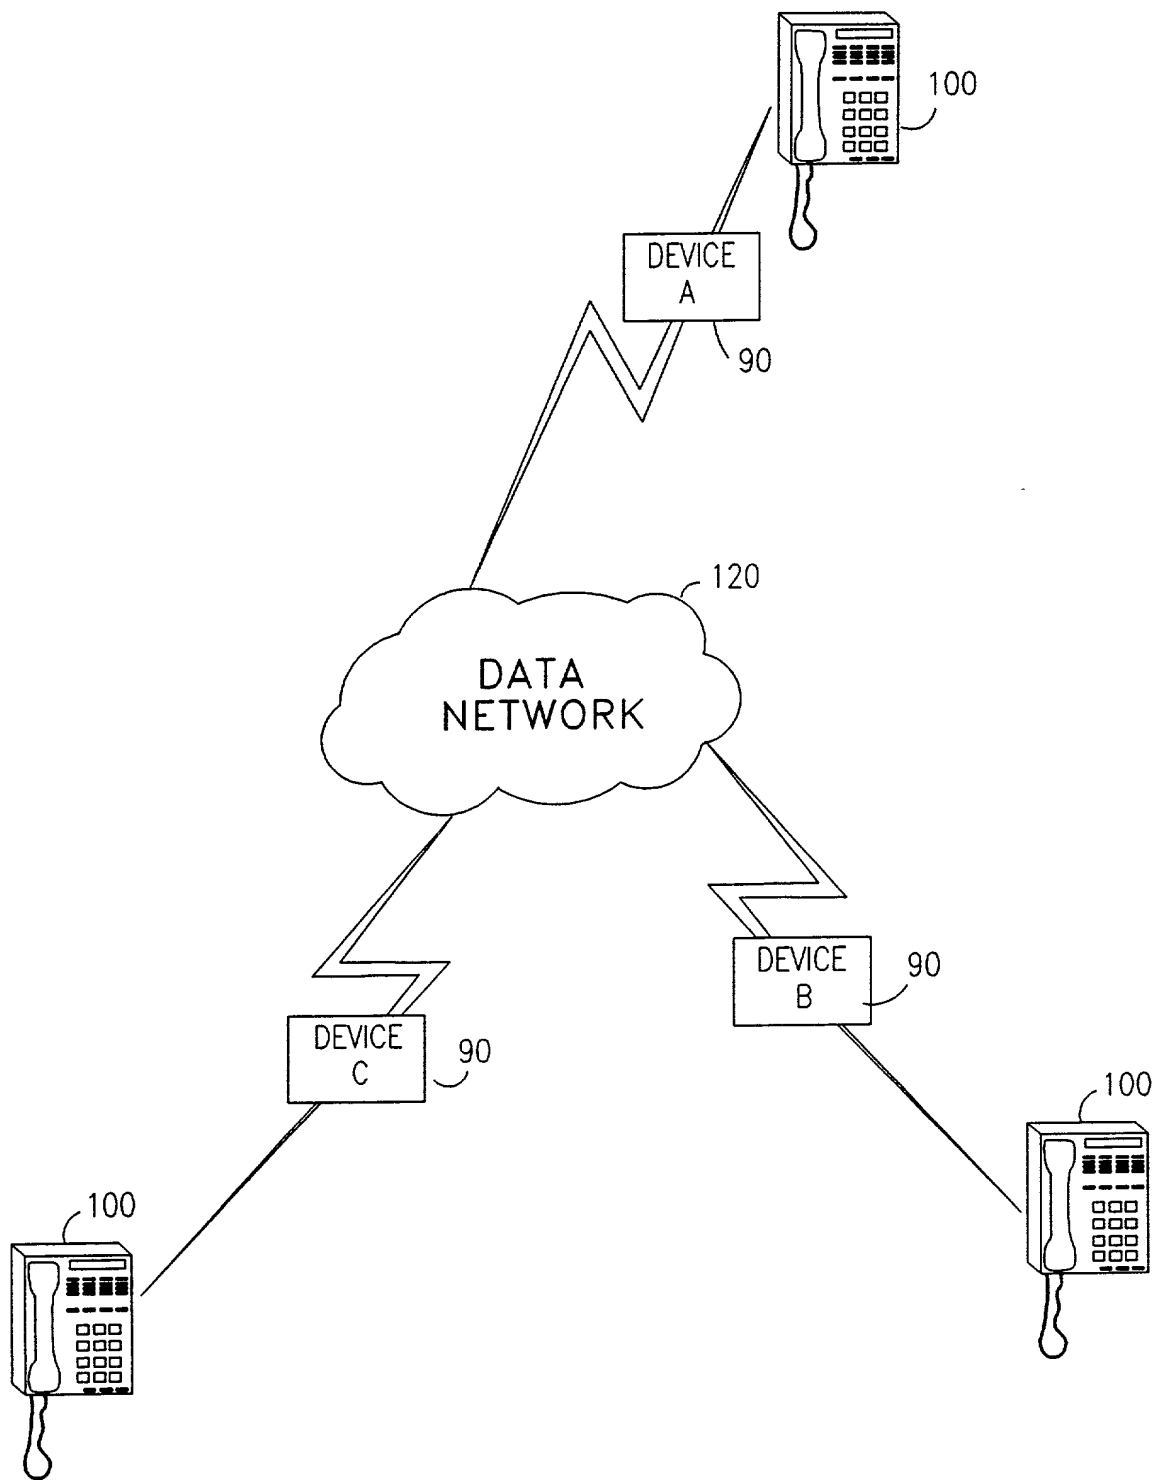


FIG. 12

